



IP66 220-240V 50/60Hz

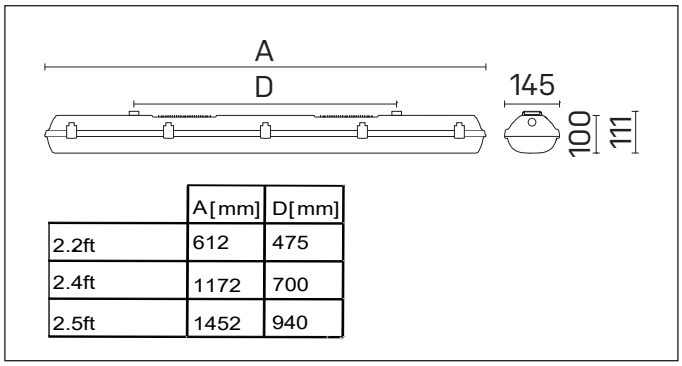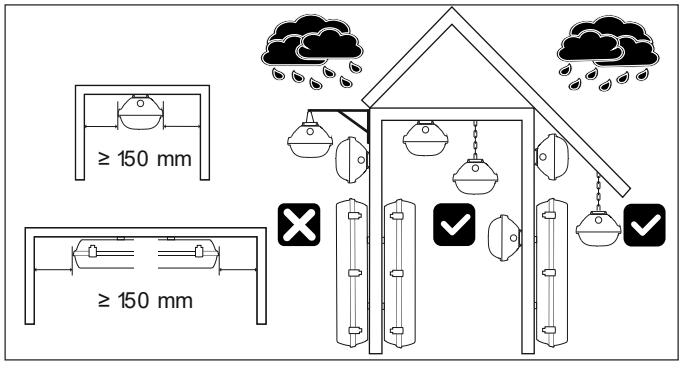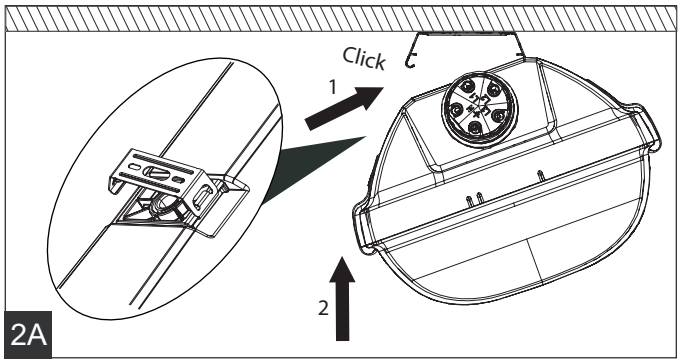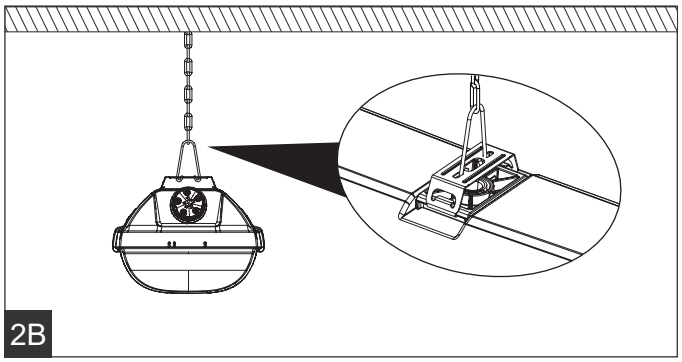



	A[mm]	D[mm]
2.2ft	612	475
2.4ft	1172	700
2.5ft	1452	940








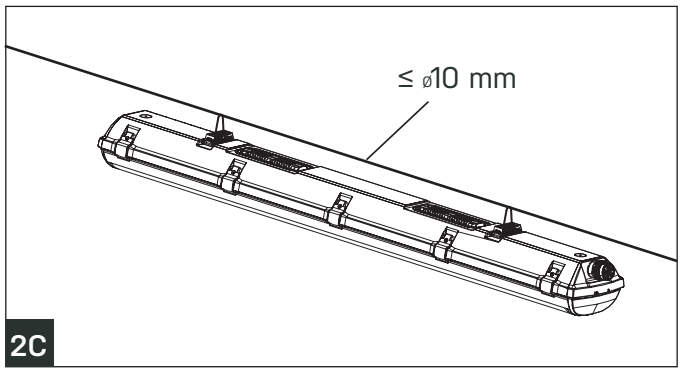

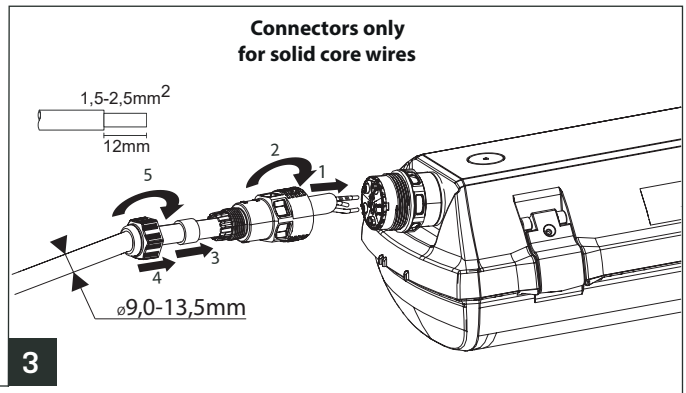

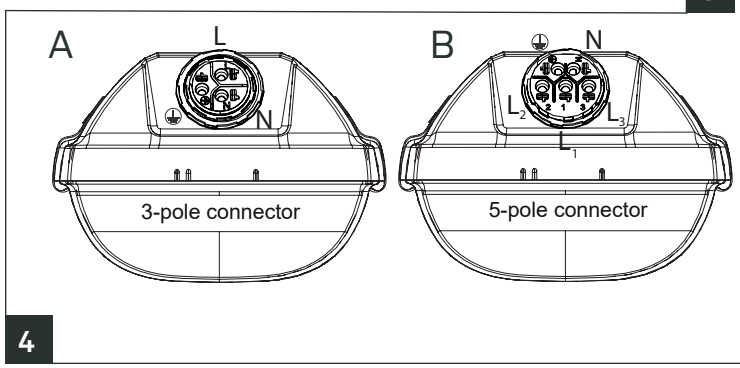


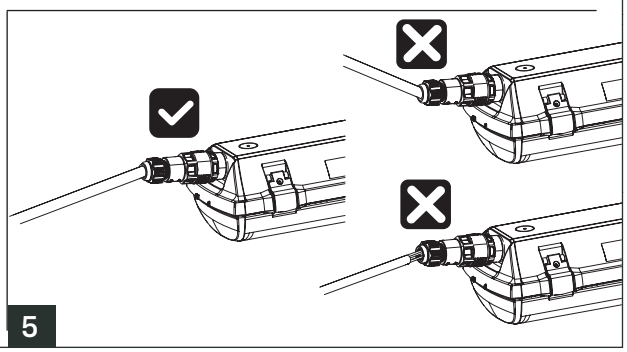


Table of maximal number of luminaires in one line				10A B Σ luminaires	16A B Σ luminaires	10A C Σ luminaires	16A C Σ luminaires
Length	∑lm	∑lm	∑lm				
2.2ft	2600			32	50	52	85
2.2ft	3200	4400		10	16	16	26
2.4ft	5200	6400	8800	10	16	16	26
2.4ft	12800			11	18	18	30
2.5ft	6500	8000	11000	10	16	16	26
2.5ft	16000			11	18	18	30

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!




Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.


For verification of sources by the supervisory authorities, it is necessary to cut the diffuser of the luminaire at the height of 60 mm from the lower surface of the base and remove the reflector with the light and power supply.

IP66 220-240V 50/60Hz


Connection 1x3P

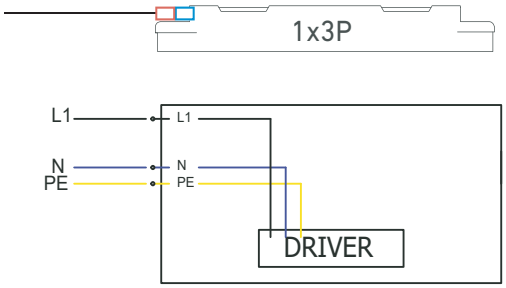


Connection 1x5P DALI

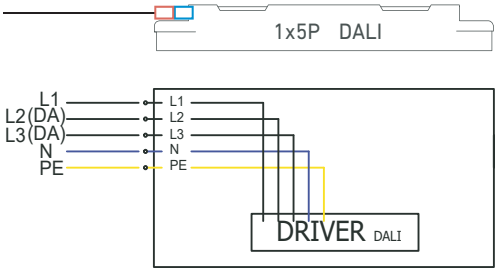

Connection 2x3P

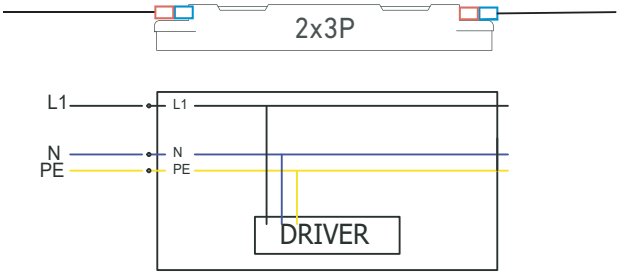

Connection 2x5P

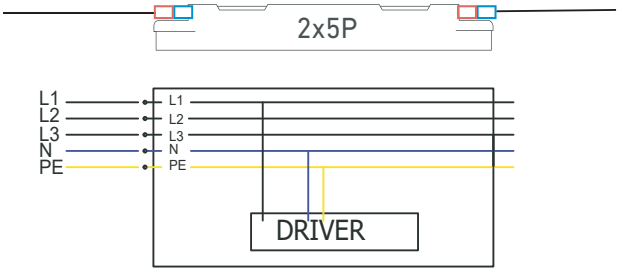

Connection 2x5P DALI

