

IP40


220-240V
50/60Hz

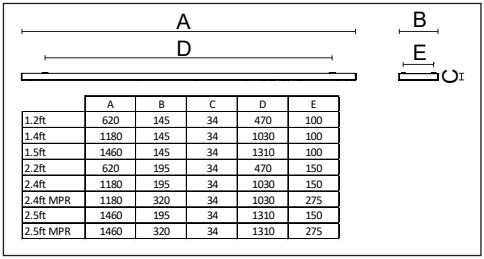



	A	B	C	D	E
1.2ft	620	145	34	470	100
1.4ft	1180	145	34	1030	100
1.5ft	1460	145	34	1310	100
2.2ft	620	195	34	470	150
2.4ft	1180	195	34	1030	150
2.4ft MPR	1180	320	34	1030	275
2.5ft	1460	195	34	1310	150
2.5ft MPR	1460	320	34	1310	275





Cable gland positions			
Length of luminaire	A	B	C
1.2ft/2.2ft	105	-	27,5
1.4ft/2.4ft/2.4ft MPR	105	590	27,5
1.5ft/2.5ft/2.5ft MPR	105	730	27,5

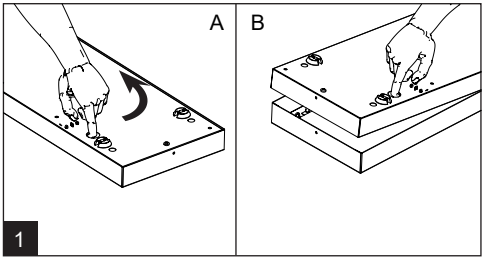


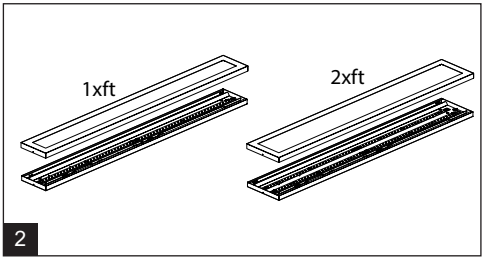


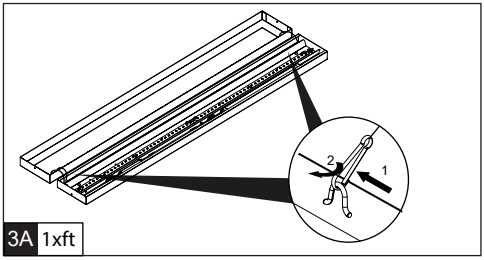


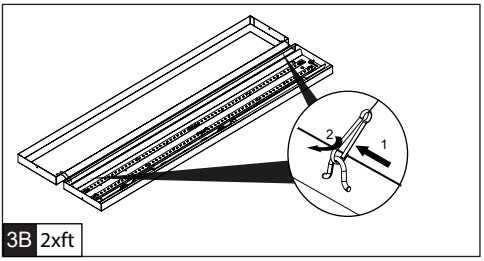

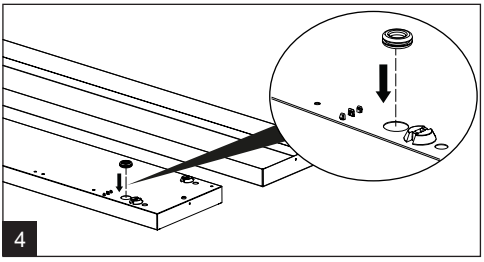


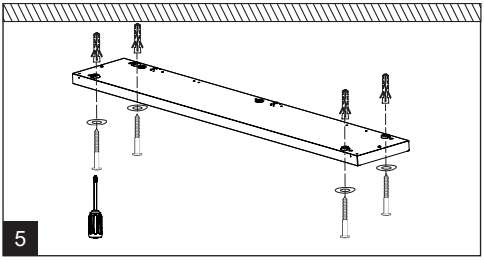

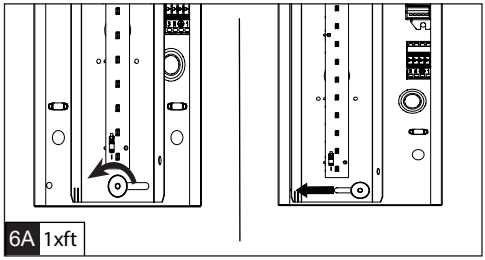


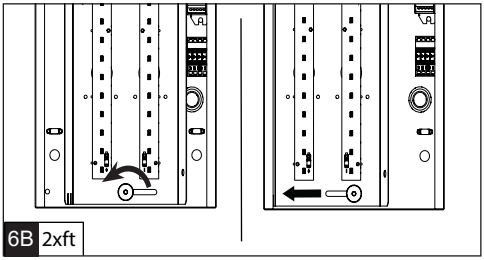


IP40 220-240V 50/60Hz

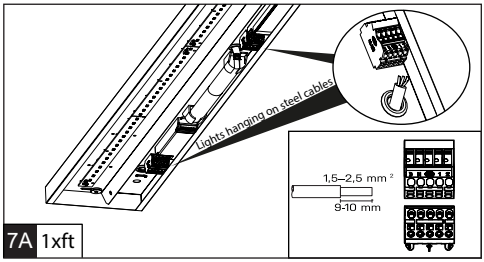


7A 1xft

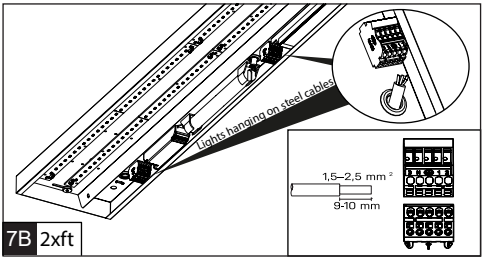


7B 2xft

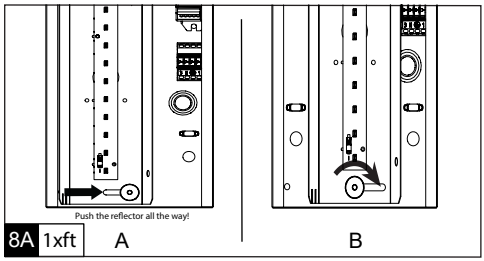


8A 1xft

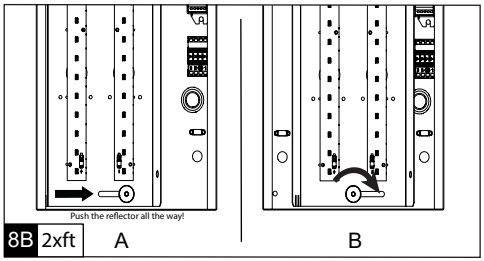


8B 2xft

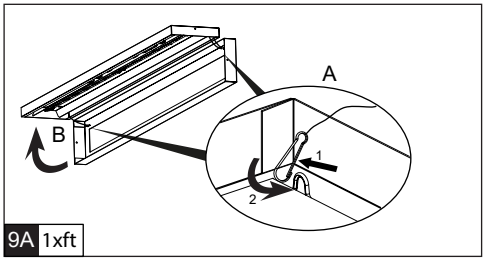

9A 1xft

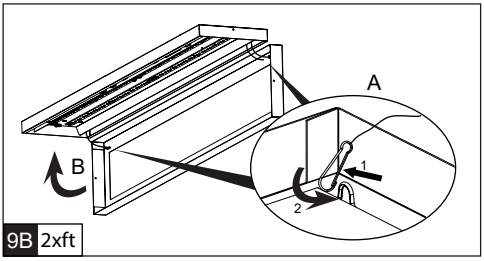



9B 2xft

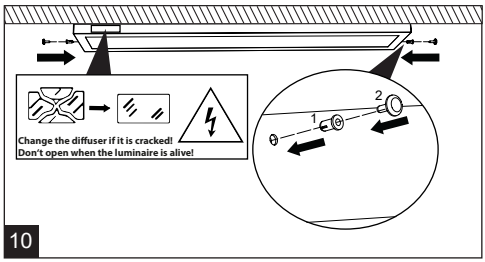

10

Table of maximal number of luminaires in one line				10A B Σ	16A B Σ	10A C Σ	16A C Σ
Length	∑lm	∑lm	∑lm	luminaires	luminaires	luminaires	luminaires
1.2ft	1300	1600		32	50	52	85
1.4ft	2600			32	50	52	85
1.4ft	3200	4400		10	16	16	26
1.5ft	3250	4000		10	16	16	26
2.2ft	2600			32	50	52	85
2.2ft	3200	4400		10	16	16	26
2.4ft	5200	6400		10	16	16	26
2.5ft	6500	8000		10	16	16	26





The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.