

LYRA



... fashionable for every interior.


USE

LYRA is round LED wall and ceiling – mounted fashionable luminaire for every interior.

It is perfect solution for residential zones, corridors, lounges, hotels, restaurants and entrance areas.

ADVANTAGES

- Light fitting protection IP54
- Temperature resistance from t_a -10 to 35 °C
- Lifetime: 50 000 hours / L80B50
- High mechanical resistance: IK10

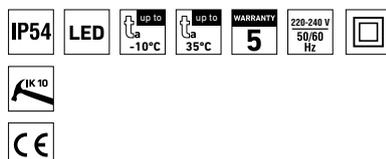




LYRA



TECHNICAL DESCRIPTION

- Light fitting protection: IP54
 - Maximum ambient temperature: 35 °C
 - Lifetime: 50 000 hours / L80B50
 - Maximum light fitting efficiency: 113 lm/W
 - CRI > 80: 4000 K
 - CRI > 80: 3000 K
 - Diffuser: translucent polycarbonate
 - Body: polycarbonate
 - Light source body: polycarbonate
 - Electronic equipment: LED modules, fixed output driver
- The values stated for power consumption and luminous flux are in a tolerance of + - 7,5%

Code	Type	Max. ambient temperature [°C]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]	A [mm]	D [mm]
For ambient temperature max. $t_a = 35\text{ °C}$ - body: polycarbonate - diffuser: translucent polycarbonate								
41001	LYRA 1500/840	35	1670	14,8	113	0,6	200	43
41002	LYRA 1500/830	35	1540	14,8	104	0,6	200	43



LIGHT FITTING ATTACHMENT AND ITS DETAILED VIEW

Directly to a ceiling or a wall with the use of screws

