


IP66
IP69 (80°C)


220-240V
50/60Hz

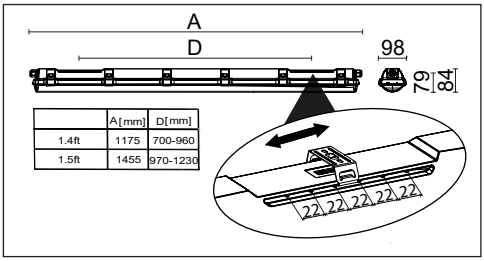


	A[mm]	D[mm]
1.4ft	1175	700-960
1.5ft	1455	970-1230

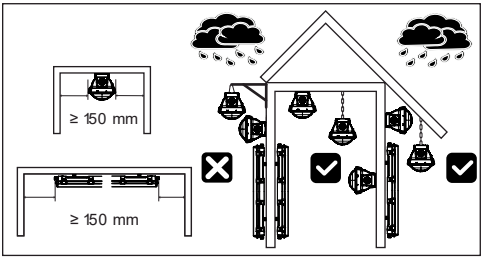

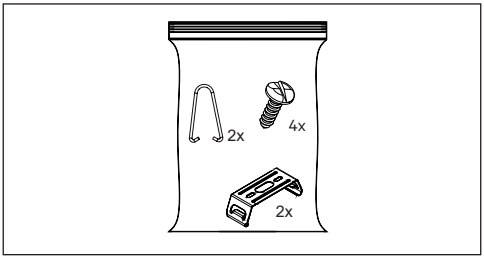


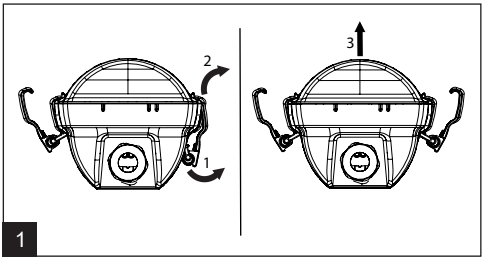


1

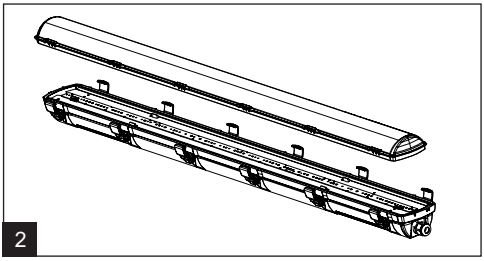


2

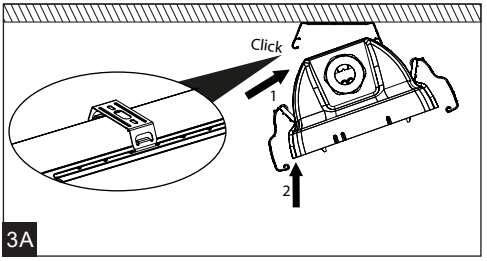


3A

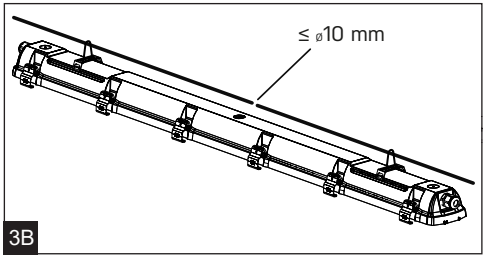


3B

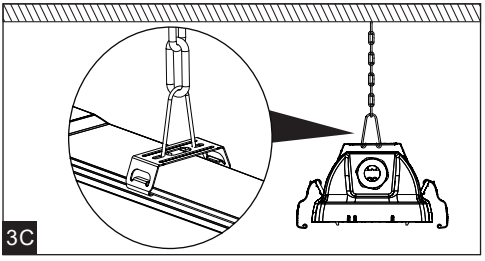

3C

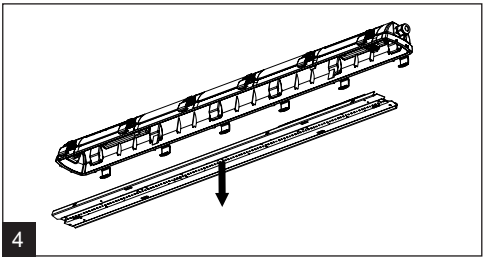


4

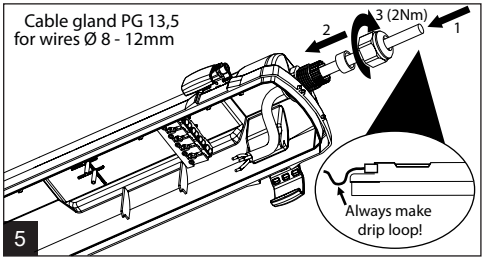



5


IP66
IP69 (80°C)

220-240V
50/60Hz

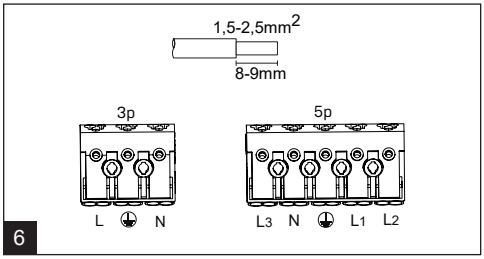

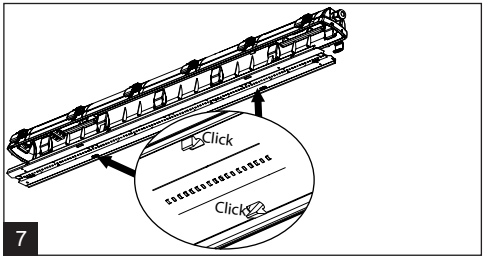

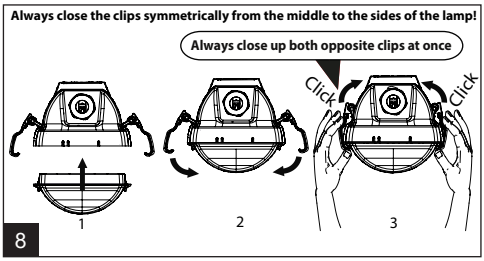

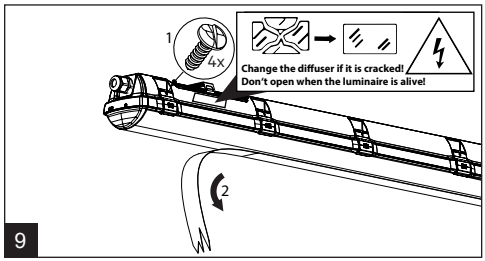

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.

Maximum of the luminaires in one line				10A B Σ	16A B Σ	10A C Σ	16A C Σ
Length	∑lm	∑lm	∑lm	luminaires	luminaires	luminaires	luminaires
1.4ft	3200	4400		20	32	33	54
1.5ft	4000	5500		20	32	33	54

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!

