
IP40

220-240V
50/60Hz

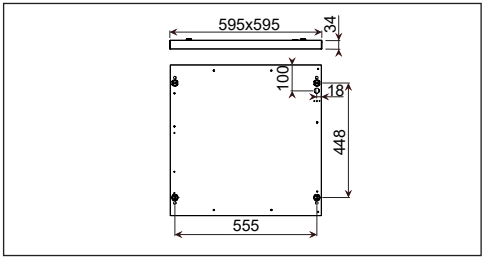



#


Recessed luminaire


#


Surface-mounted luminaire

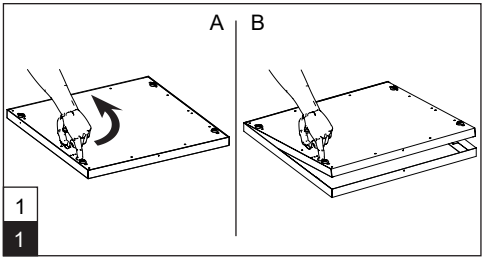


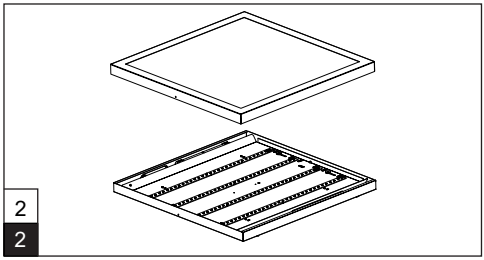


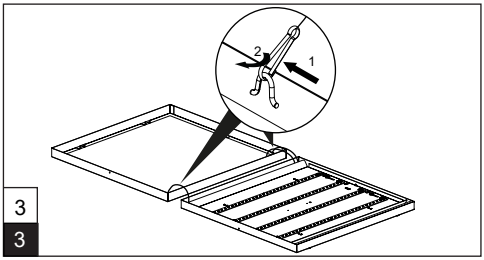

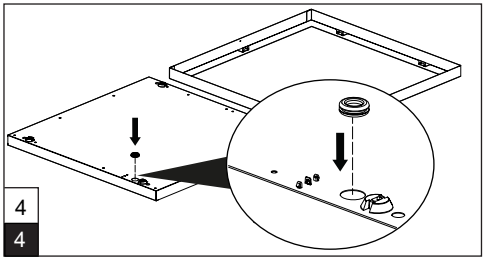

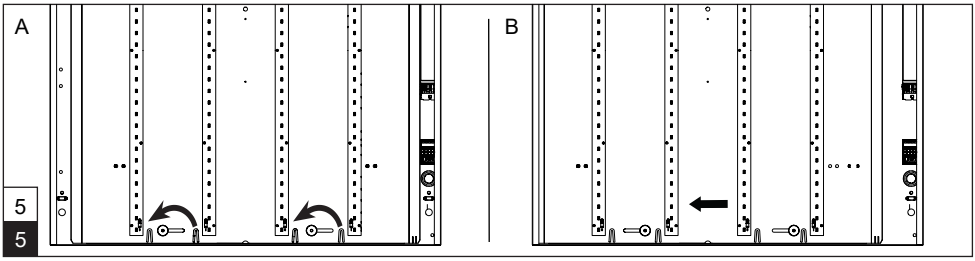


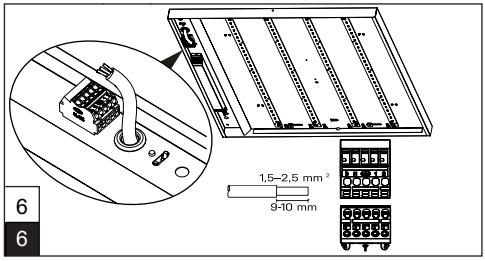


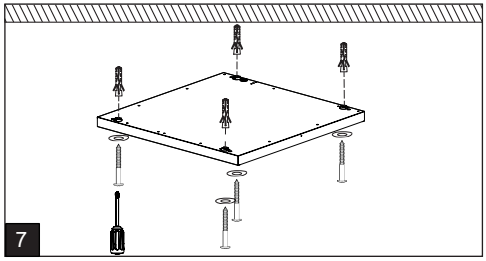


IP40

220-240V
50/60Hz

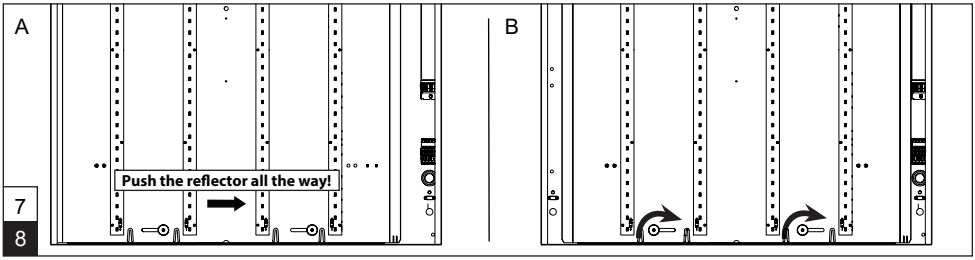

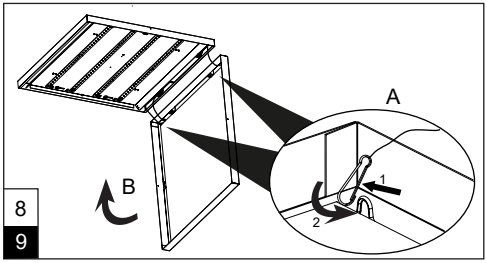

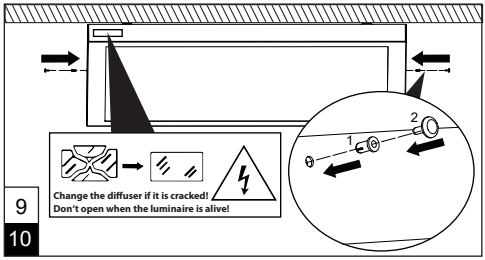



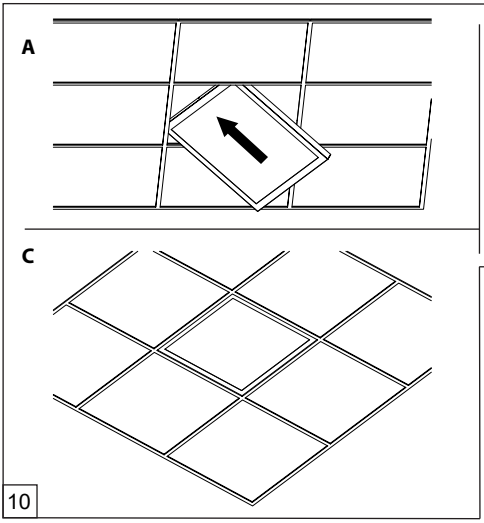


Table of maximal number of luminaires in one line				10A B Σ luminaires	16A B Σ luminaires	10A C Σ luminaires	16A C Σ luminaires
Length	∑lm	∑lm	∑lm				
SQUARE	5200	6400		10	16	16	26





Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!