


IP66
IP69 (80°C)


220-240V
50/60Hz

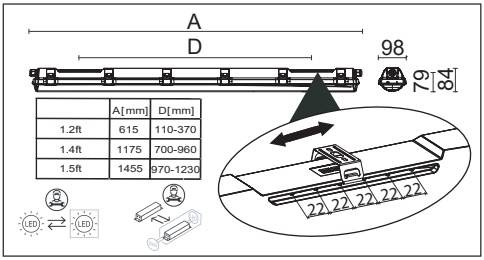


	A[mm]	D[mm]
1.2ft	615	110-370
1.4ft	1175	700-960
1.5ft	1455	970-1230

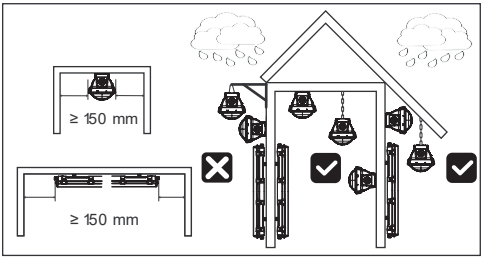


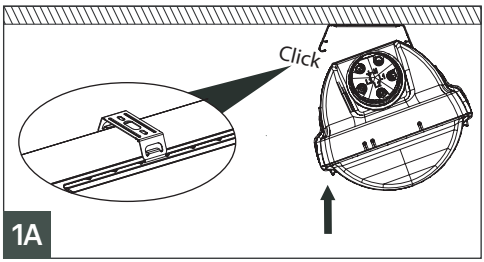


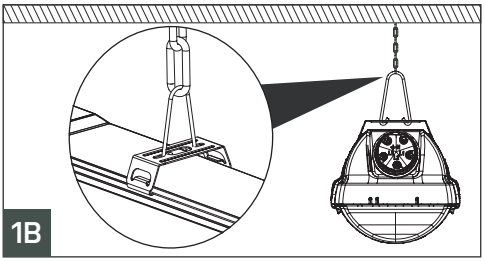

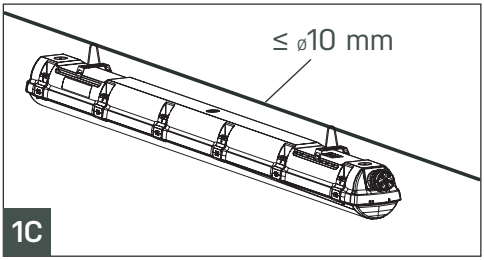


A **Connectors only or solid core wires.**

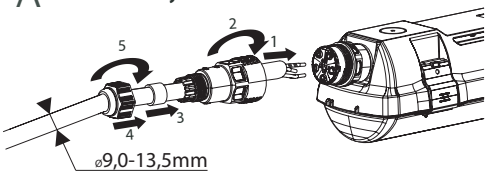

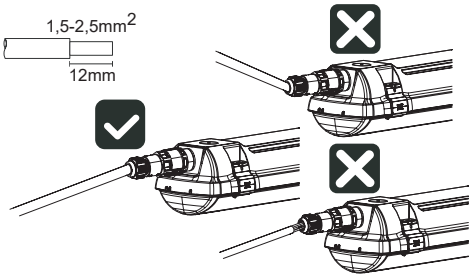

B

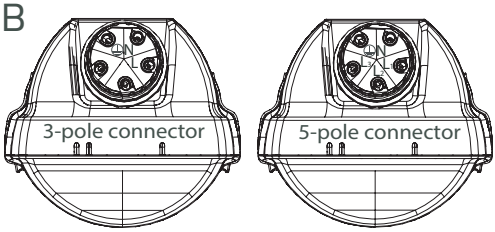

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.


Maximum of the luminaires WHITE/COLOUR LED in one line				10A B Σ	16A B Σ	10A C Σ	16A C Σ
Length	∑lm	∑lm	∑lm	luminaires	luminaires	luminaires	luminaires
1.2ft	1300	1600	2200	32	50	52	85
1.4ft	2600			32	50	52	85
1.4ft	3200	4400	6400	10	16	16	26
1.4ft	8000			11	17	17	27
1.5ft	3250	4000	5500	10	16	16	26
1.5ft	8000	10000		11	17	17	27

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!


IP66
IP69 (80°C)

220-240V
50/60Hz


Connection 1x3P

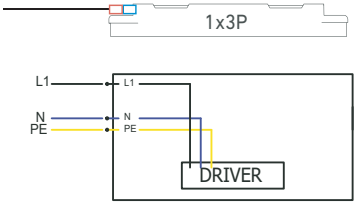


Connection 1x5P DALI

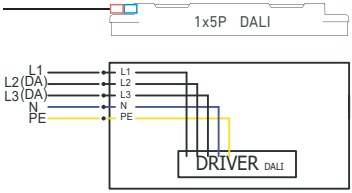

Connection 2x3P

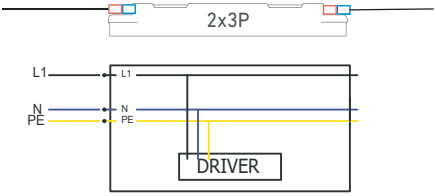

Connection 2x5P

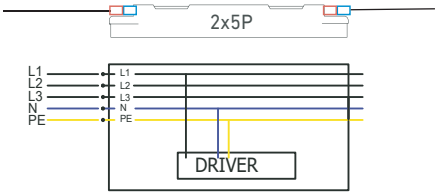



ELECTRO TERMINAL 88706806
BJB 84.095.3301-1

Connection 2x5P DALI

