


IP66
IP69 (80°C)


220-240V
50/60Hz

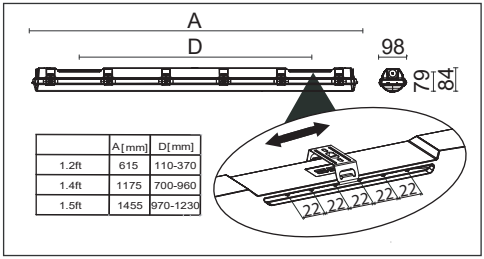



	A[mm]	D[mm]
1.2ft	615	110-370
1.4ft	1175	700-960
1.5ft	1455	970-1230

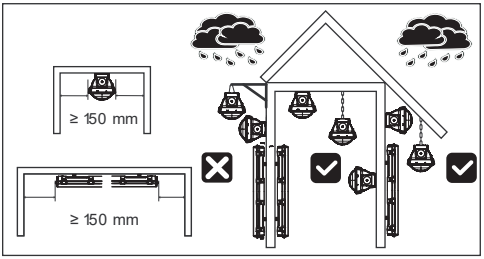


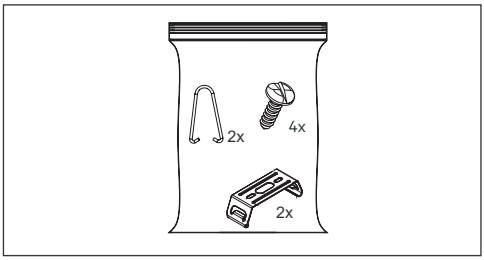


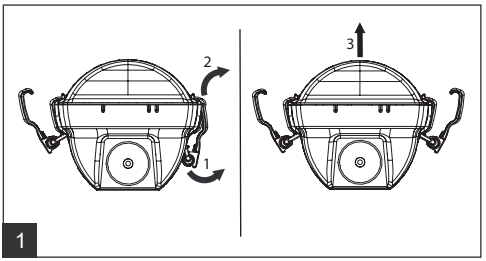


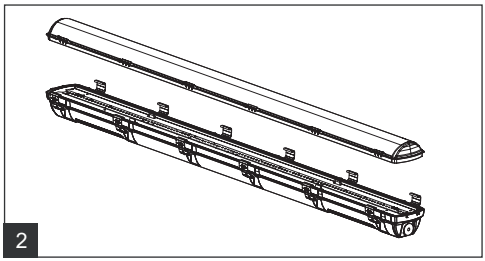


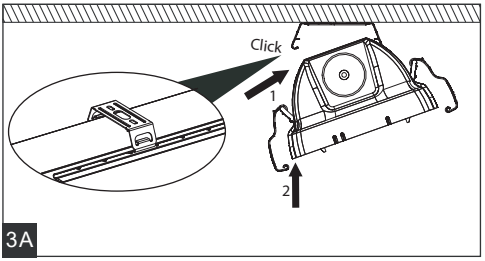

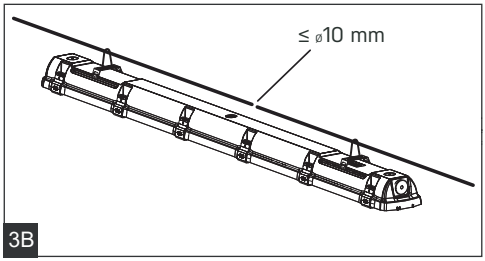

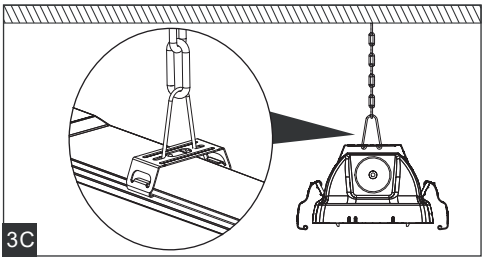


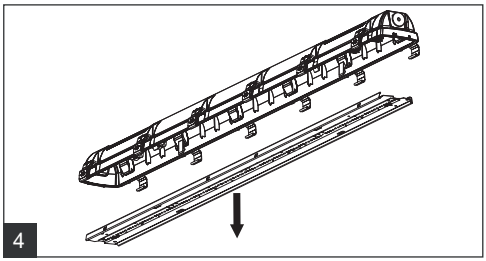


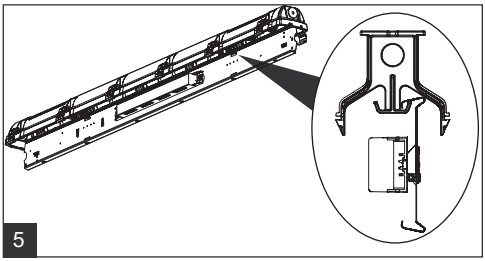



IP66
IP69 (80°C)


220-240V
50/60Hz

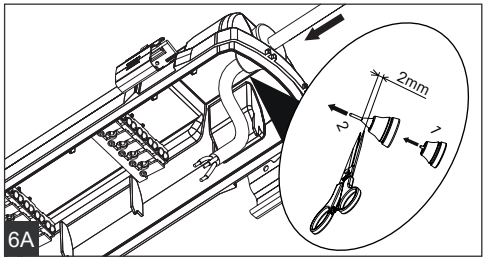


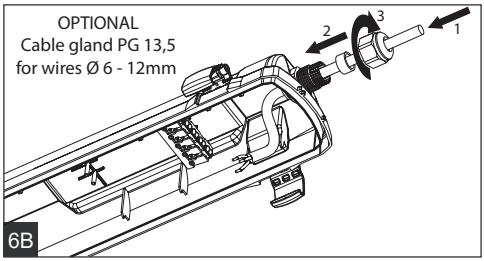


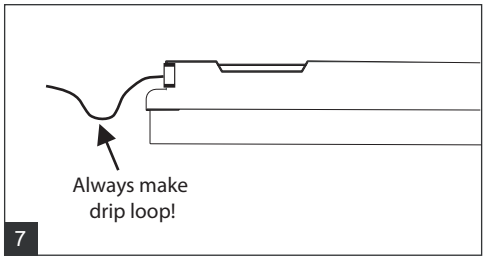

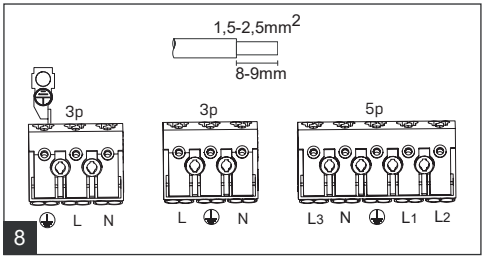

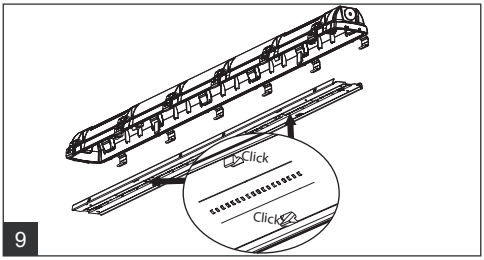

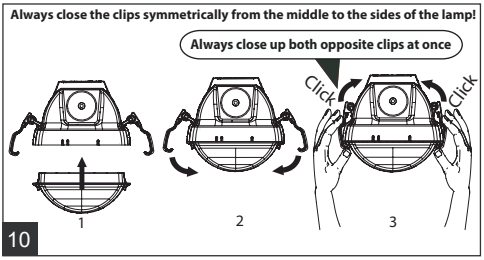

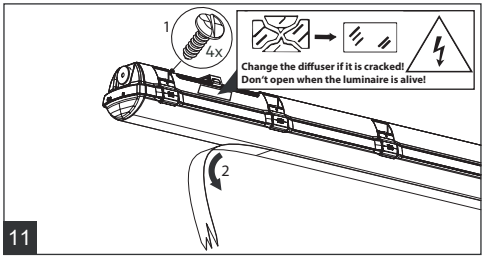

Maximum of the luminaires in one line				10A B Σ luminaires	16A B Σ luminaires	10A C Σ luminaires	16A C Σ luminaires
Length	Σlm	Σlm	Σlm				
1.2ft	1300	1600	2200	58	93	58	93
1.4ft	2600	3200	4400	41	65	41	65
1.4ft	6400			29	47	29	47
1.5ft	3250	4000		41	65	41	65
1.5ft	5500	8000		29	47	29	47

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.

