



100961


NANOTTICA 1.4ft NB ABS 4400/840 DALI 3F M3h

8596328009617



- Degree of protection: IP66/IP69
- Ambient temperature: 0–25 °C
- Impact strength: IK06
- Life time: 50000 hours
- System efficacy: 144 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 21
- Max. number of luminaires per circuit breaker C16: 35
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: dark grey ABS (high chemical resistance, UV stability, RAL 7001)
- Diffuser: clear AC with nano-optics (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless seven-pole terminal block, 7-wire connecting cabling for feed-through installation (1.5 mm² cross-section, 2.5 mm² available on demand)
- Absolute control over emitted light thanks to patented nano-optics
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: narrow beam (NB); optimal mounting height: 7.5 to 12 m
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

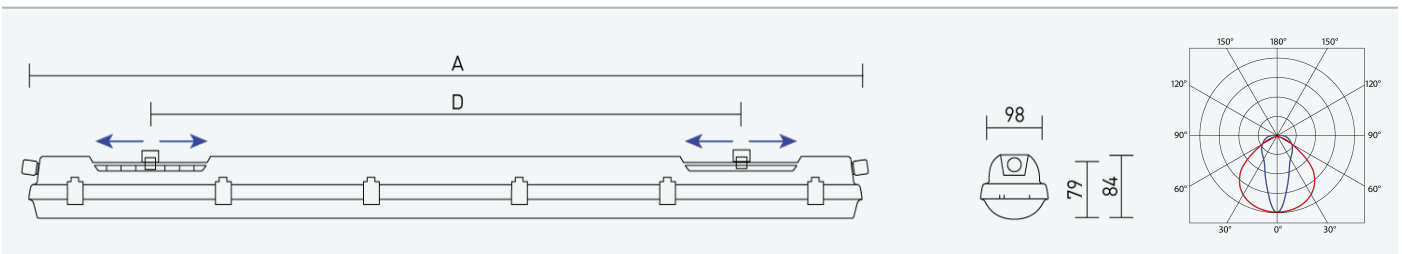

| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|--------|---|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|-----------|
| 100961 | NANOTTICA 1.4ft NB ABS 4400/840 DALI 3F M3h | 25 | 4300 | 3740 | 26 | 144 | 1,9 | 1170 | 700 - 960 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES




CERTIFICATION



DOWNLOAD





100961

NANOTTICA 1.4ft NB ABS 4400/840 DALI 3F M3h

8596328009617

