



102048


NANOTTICA 1.5ft CLASS II PCc 8000/840 DALI M1h

8596328020483



- Degree of protection: IP66/IP69
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 165 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- 2, 4 or 6-pole connectors, conductor cross-sectional area of 1.5 or 2.5 mm2
- Protection class: II
- Max. number of luminaires per circuit breaker B16: 21
- Max. number of luminaires per circuit breaker C16: 35
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 9
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: clear PC with nano-optics (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless six-pole terminal block
- Absolute control over emitted light thanks to patented nano-optics
- Variable suspension spacing ranging from 970 - 1230 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Basic beam angle: medium beam (MB); optimal mounting height: 3.5 to 8 m
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

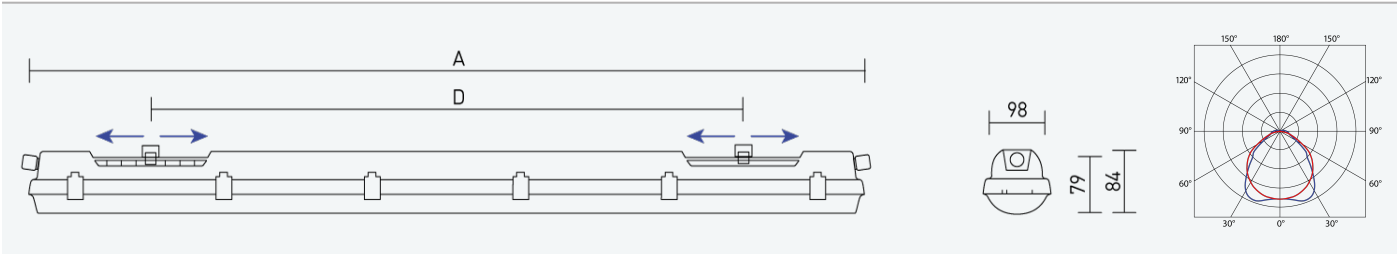

| Code   | Type                                           | Ta Max.:<br>[°C] | Luminous flux of<br>LED modules<br>[lm] | Luminous flux of<br>light fitting:<br>[lm] | Power consumption:<br>[W] | System<br>efficacy:<br>[lm/W] | Net weight:<br>[kg] | A<br>[mm] | D<br>[mm]  |
|--------|------------------------------------------------|------------------|-----------------------------------------|--------------------------------------------|---------------------------|-------------------------------|---------------------|-----------|------------|
| 102048 | NANOTTICA 1.5ft CLASS II PCc 8000/840 DALI M1h | 25               | 7780                                    | 7310                                       | 44,3                      | 165                           | 2,1                 | 1450      | 970 - 1230 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD





**102048**

**NANOTTICA 1.5ft CLASS II PCc 8000/840 DALI M1h**

**8596328020483**

