




- Degree of protection: IP66
- Ambient temperature: 0–40 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 134 lm/W
- Cable glands: plastic ATEX M20x1.5, or metal (in INOX design on request)
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 23
- Max. number of luminaires per circuit breaker C16: 39
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: steel sheet, white (RAL 9003)
- Diffuser: satin, heat-strengthened safety glass
- Reflector: steel sheet, white (RAL 9003)
- Sealing: glued EPDM
- Connection: ATEX, screwless WAGO, maximum cable cross-section: 4 mm2
- Light fitting certified for environments with potentially explosive atmospheres created by gas, dust or flammable vapours, group II, category 2 (zone 1/21)
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver, Ex battery box with ATEX certificate
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

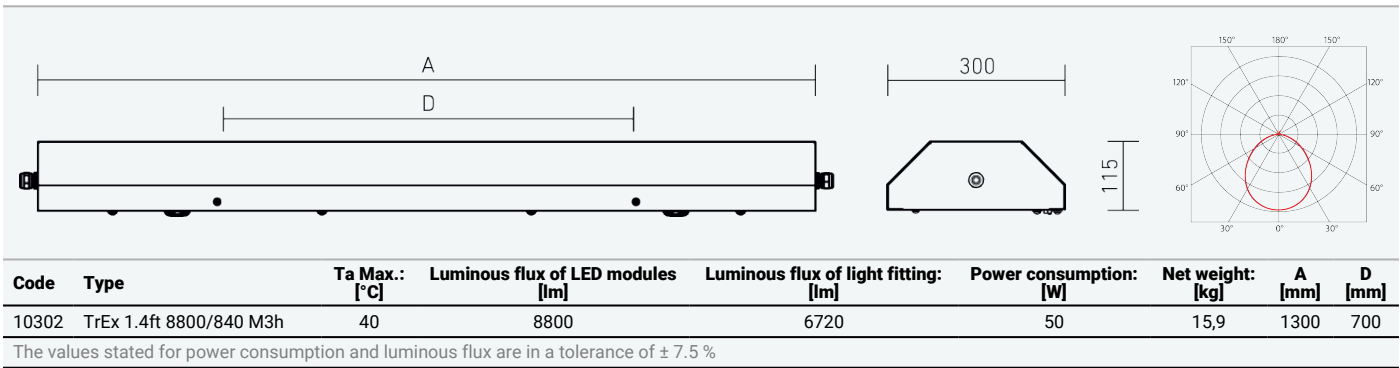

FEATURES

IP66

up to

0°C

up to

40°C

IK 10

LED

220-240 V
50/60 Hz

CCT
4000 K
3 SDCM

L80
B50

CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
- DATA SHEET
- CE
- ATEX
- LDT DATA

