




- Degree of protection: IP66
- Ambient temperature: -40–55 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 134 lm/W
- Cable glands: plastic ATEX M20x1.5, or metal (in INOX design on request)
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 23
- Max. number of luminaires per circuit breaker C16: 39
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: AISI 304 stainless steel
- Diffuser: satin, heat-strengthened safety glass
- Reflector: steel sheet, white (RAL 9003)
- Sealing: glued EPDM
- Connection: ATEX, screwless WAGO, maximum cable cross-section: 4 mm2
- Light fitting certified for environments with potentially explosive atmospheres created by gas, dust or flammable vapours, group II, category 2 (zone 1/21)
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver (AC, DC on demand)

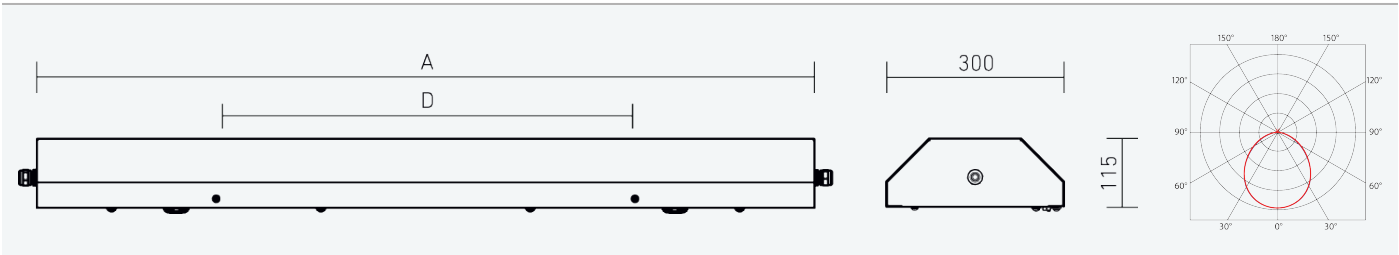

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	Net weight: [kg]	A [mm]	D [mm]
10483	TrEx 1.4ft 8800/840 INOX 3F	55	8800	6720	50	14,95	1300	700

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66

up to

-40°C

up to

55°C

IK 10

LED

WARRANTY 5

▽

⏏

220-240 V
50/60 Hz

3F

CCT

4000 K

3 SDCM

L80

B50

CERTIFICATION



DOWNLOAD

INSTALLATION MANUAL

DATA SHEET

CE

ATEX

LDT DATA

