



10492


NAOS 1.4ft AS 6400/840 DALI s

8590515104925



- Degree of protection: IP40
- Ambient temperature: -25–35 °C
- Impact strength: IK02
- Life time: 50000 hours
- System efficacy: 147 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 30
- Max. number of luminaires per circuit breaker C16: 51
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: D

- Body: steel sheet, aluminium white colour (RAL 9006)
- Diffuser: asymmetrical acrylic (PMMA)
- Connection: screwless five-pole terminal block
- Modern, low-profile light fitting for indoor lighting in offices, corridors and common rooms
- Asymmetrical PMMA optics with optimised beam angle for lighting school boards, exhibition areas etc.
- Digitally dimmable DALI driver (AC/DC)

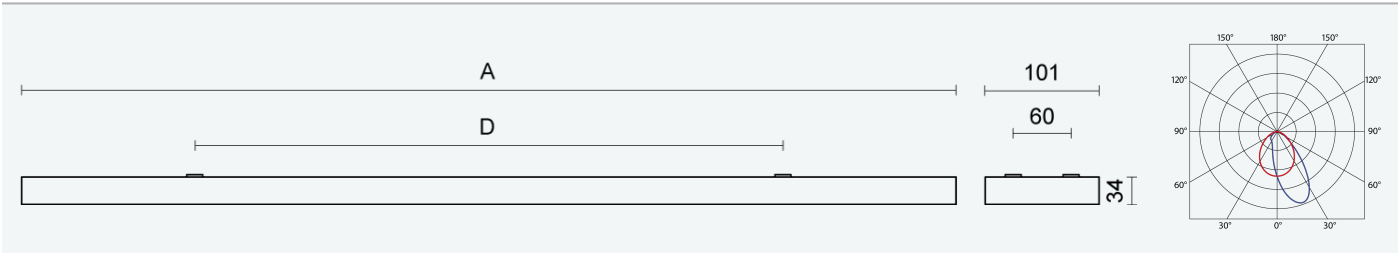

Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	A [mm]	D [mm]
10492	NAOS 1.4ft AS 6400/840 DALI s	6360	5720	38,8	147	1180	1030

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP40

up to
-25°C

up to
35°C

LED

WARRANTY
5

D

220-240 V
50/60 Hz

DALI

CRI
>80

CCT
4000 K
3 SDCM

L90
B10

→

DOWNLOAD

INSTALLATION MANUAL

DATA SHEET

LDT DATA



10492

NAOS 1.4ft AS 6400/840 DALI s

8590515104925

