

105063


PRIMA 1.5ft TRS PCc 8000/840 1F

8596328050633



- Degree of protection: IP66/IP69
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 165 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: clear PC (high mechanical resistance, UV stability)
- Diffuser: clear PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003), modified for indirect lighting
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm<sup>2</sup> cross-section, 2.5 mm<sup>2</sup> available on demand)
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 970 - 1230 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

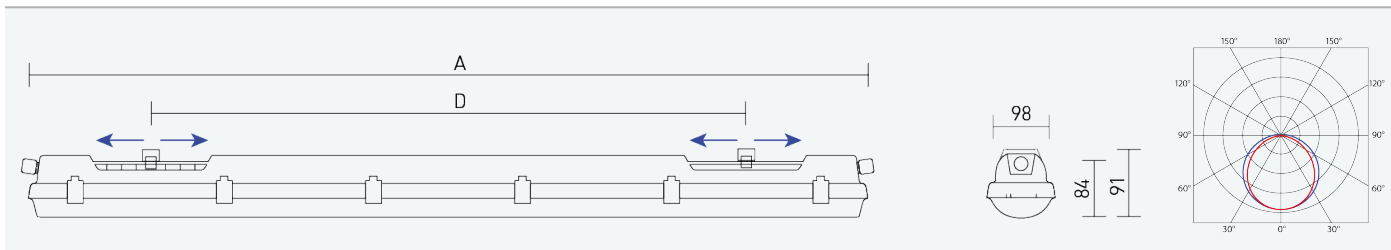

| Code   | Type                            | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm]     |
|--------|---------------------------------|---------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|------------|
| 105063 | PRIMA 1.5ft TRS PCc 8000/840 1F | 45            | 7780                              | 7310                                 | 44,3                   | 165                     | 2,1              | 1450   | 970 - 1230 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

## FEATURES



## CERTIFICATION



## DOWNLOAD





105063

PRIMA 1.5ft TRS PCc 8000/840 1F

8596328050633

