

105156


PRIMA 1.4ft TRS PC 2600/840 DALI 3F M1h

8596328051562



- Degree of protection: IP66/IP69
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 152 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 21
- Max. number of luminaires per circuit breaker C16: 35
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: clear PC (high mechanical resistance, UV stability)
- Diffuser: clear PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003), modified for indirect lighting
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless seven-pole terminal block, 7-wire connecting cabling for feed-through installation (1.5 mm<sup>2</sup> cross-section, 2.5 mm<sup>2</sup> available on demand)
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

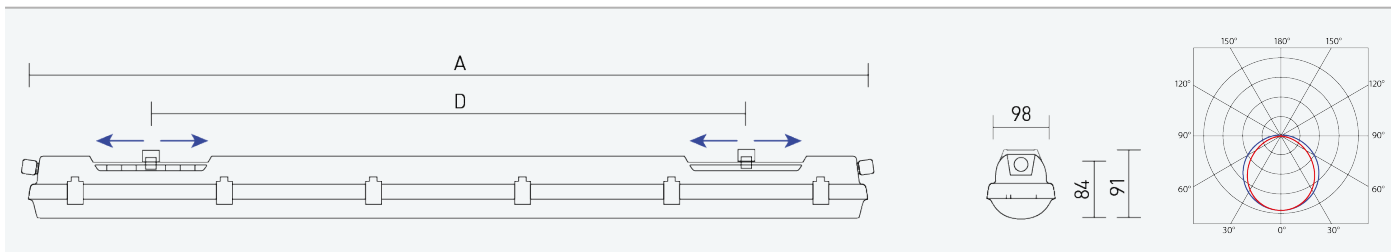

| Code   | Type                                       | Ta Max.:<br>[°C] | Luminous flux of<br>LED modules<br>[lm] | Luminous flux of<br>light fitting:<br>[lm] | Power consumption:<br>[W] | System<br>efficacy:<br>[lm/W] | Net weight:<br>[kg] | A<br>[mm] | D<br>[mm] |
|--------|--------------------------------------------|------------------|-----------------------------------------|--------------------------------------------|---------------------------|-------------------------------|---------------------|-----------|-----------|
| 105156 | PRIMA 1.4ft TRS PC<br>2600/840 DALI 3F M1h | 25               | 2600                                    | 2440                                       | 16,1                      | 152                           | 1,9                 | 1170      | 700 - 960 |

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES



## CERTIFICATION



## DOWNLOAD





105156 | PRIMA 1.4ft TRS PC 2600/840 DALI 3F M1h

8596328051562

