TREVOS


CODE | EAN


106620 | PRIMA 1.2ft PC 3F NM3hAt | 8596328066207




- Degree of protection: IP66/IP69
- Ambient temperature: 5—50 °C
- Impact strength: IK10
- Life time: 150000 hours / L95 @25°C
- System efficacy: 133 lm/W
- Cable glands: M20x1.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 100
- Max. number of luminaires per circuit breaker C16: 170
- Energy efficiency class of the light source: C

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Translucent PC (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 110 - 370 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- Emergency back-up power supply with autotest and 3 hour runtime
- Emergency back-up power supply for temporary emergency lighting, connected to L3 (lum. flux 440lm)

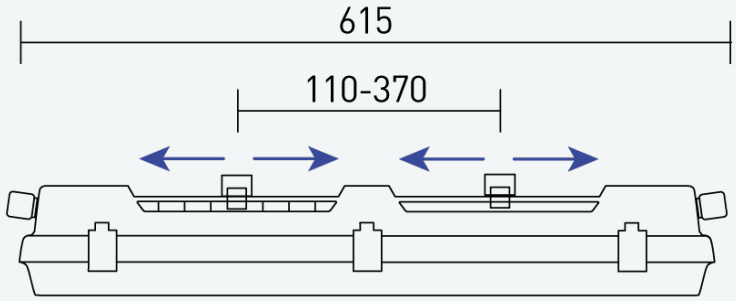





Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	Net weight: [kg]
106620	PRIMA 1.2ft PC 3F NM3hAt	500	440	3,3	1,4

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66 IP69 up to ta 50°C IK 10 LED 220-240 V 50/60 Hz CCT 4000 K 3 SDCM L95 @25°C

CERTIFICATION

CE HACCP

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | HACCP | LDT DATA

TREVOS

CODE | EAN

106620 | PRIMA 1.2ft PC 3F NM3hAt | 8596328066207



