TREVOS

CODE


EAN


106902 | LANUS ROUND M 25000/840 A60 | 8596328069024




- Degree of protection: IP66
- Ambient temperature: -40—45 °C
- Impact strength: IK10
- Life time: 100000 hours / L70 @25°C
- System efficacy: 152 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 10
- Max. number of luminaires per circuit breaker C16: 17
- Power factor: 0,95
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: Aluminium alloy, black colour (RAL 9011)
- Diffuser: Clear PMMA with integrated optics
- Sealing: Silicone sealing
- Connection: 0.4m 3-core 3x1mm2 CYSY cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Suitable for high halls, sports venues, advertising spaces and indoor and outdoor industrial spaces.
- Clear PMMA with integrated optics, beam angle 60°
- ON/OFF electronic driver (AC, 1-10V dimmable driver controlled by 2-core 2x0.5mm2 cable)
- Supplied with an eye bolt

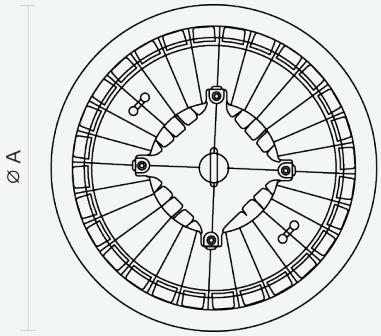

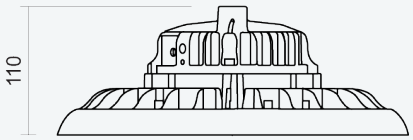

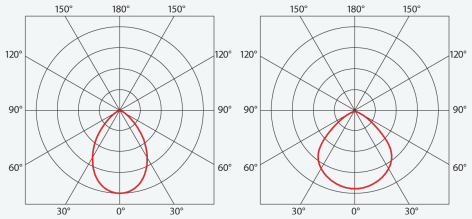

LANUS ROUND A60 LANUS ROUND A90

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]
106902	LANUS ROUND M 25000/840 A60	45	24480	22520	148,5	152	2,6	345

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66 | up to ta -40°C | up to ta 45°C | 850°C | IK 10 | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | CRI >80 | CCT 4000 K 3 SDCM | L70 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL DATA SHEET CE LDT DATA

TREVOS

CODE | EAN

106902 | LANUS ROUND M 25000/840 A60 | 8596328069024





