



**106908**


**LANUS SQUARE M 22000/840 A90**

**8596328069086**



- Degree of protection: IP66
- Ambient temperature: -40–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 153 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 9
- Max. number of luminaires per circuit breaker C16: 15
- Power factor: 0,94
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: aluminium alloy, black colour (RAL 9011)
- Diffuser: satin, heat-strengthened safety glass
- Sealing: silicone sealing
- Connection: 0.4m 3-core 3x1mm2 CYSY cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Suitable for high halls, sports venues, advertising spaces and indoor and outdoor industrial spaces.
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver (AC, 1-10V dimmable driver controlled by 2-core 2x1mm2 cable)
- Supplied with an eye bolt

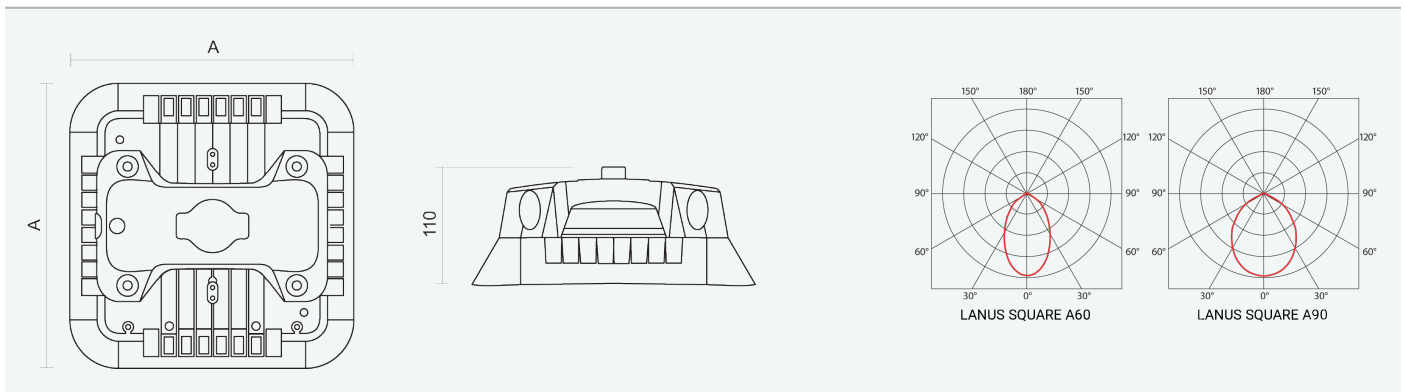

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]
106908	LANUS SQUARE M 22000/840 A90	35	21970	20650	135,2	153	3,4	345

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD



