
TREVOS

CODE

107077 | LINEA 2.4ft 8800/827-865 TW | EAN 8596328070778

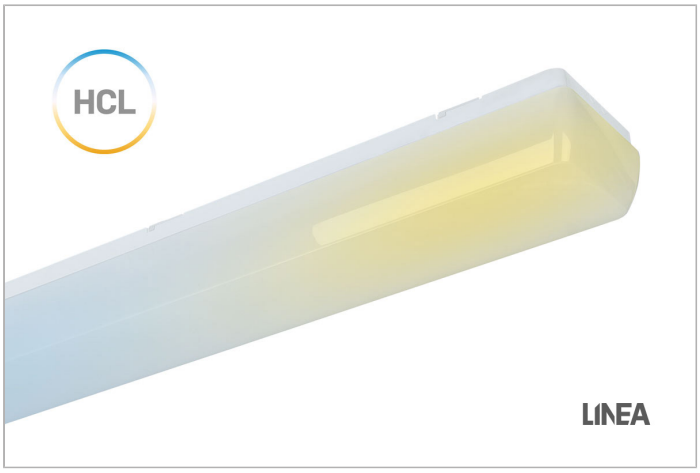

- Degree of protection: IP54
- Ambient temperature: -25—35 °C
- Impact strength: IK10
- Life time: 100000 hours / L80 @25°C
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 2700—6500 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: White polycarbonate (PC, RAL 9003), UV stable, impact resistant
- Diffuser: Translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Rotary cap (polyamide + 10 % fibreglass)
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block
- Surface-mount, plastic indoor light fitting for installation onto the ceiling or wall in public or non-public areas
- Opal diffuser made of highly permeable, translucent polycarbonate
- Digitally dimmable DALI driver DT8 (AC/DC), Tunable White modul 2700K - 6500K

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
107077	LINEA 2.4ft 8800/827-865 TW	35	8980	7130	49,7	143	2,1	1160	650

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP54 | up to ta -25°C | up to ta 35°C | 850°C | IK 10 | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | CRI >80 | L80 @25°C

CERTIFICATION

CE

DOWNLOAD

DATA SHEET CE