




107077

LINEA 2.4ft 8800/827-865 TW

8596328070778

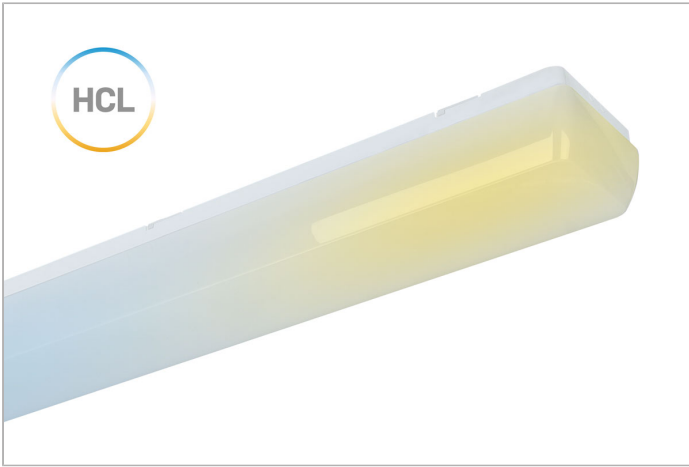

- Degree of protection: IP54
- Ambient temperature: -25–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 2700–6500 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,043
- Power factor: 0,95
- Stroboscope effect value SVM: 0,004
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: white polycarbonate (PC, RAL 9003), UV stable, impact resistant
- Diffuser: translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: steel sheet, white (RAL 9003)
- Clips: rotary cap (polyamide + 10 % fibreglass)
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block
- Surface-mount, plastic indoor light fitting for installation onto the ceiling or wall in public or non-public areas
- Opal diffuser made of highly permeable, translucent polycarbonate
- Digitally dimmable DALI driver DT8 (AC/DC), Tunable White modul 2700K - 6500K

| Code | Type | Ta Max.: [°C] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|--------|-----------------------------|---------------|--------------------------------------|------------------------|-------------------------|------------------|--------|--------|
| 107077 | LINEA 2.4ft 8800/827-865 TW | 35 | 7130 | 49,7 | 143 | 2,1 | 1160 | 650 |

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD

