TREVOS

CODE

107078 | NAOS 1.4ft 4400/827-865 TW | EAN 8596328070785

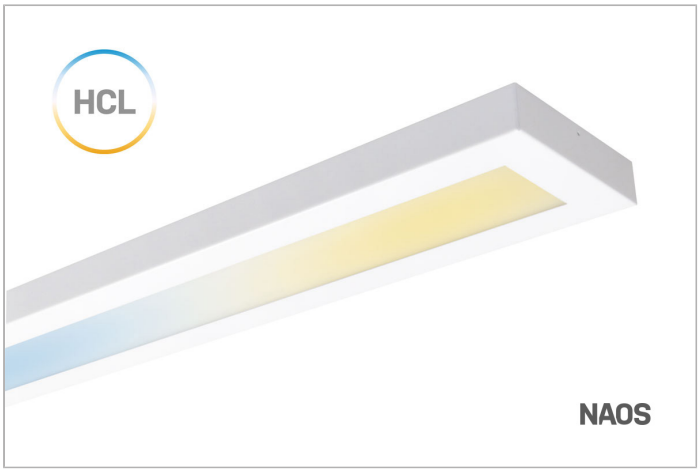

- Degree of protection: IP40
- Ambient temperature: -25—35 °C
- Impact strength: IK02
- Life time: 100000 hours / L80 @25°C
- System efficacy: 127 lm/W
- Colour rendering index CRI: 80-89, 2700—6500 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: Steel sheet, white (RAL 9003)
- Diffuser: Acrylic (PMMA), sandblasted from both sides
- Connection: Screwless five-pole terminal block
- Modern, low-profile light fitting for indoor lighting in offices, corridors and common rooms
- Opal diffuser made of highly permeable, translucent PMMA
- Digitally dimmable DALI driver DT8 (AC/DC), Tunable White modul 2700K - 6500K

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
107078	NAOS 1.4ft 4400/827-865 TW	35	4520	3310	26,0	127	3,9	1180	1030

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION

CE

DOWNLOAD

DATA SHEET CE