TREVOS

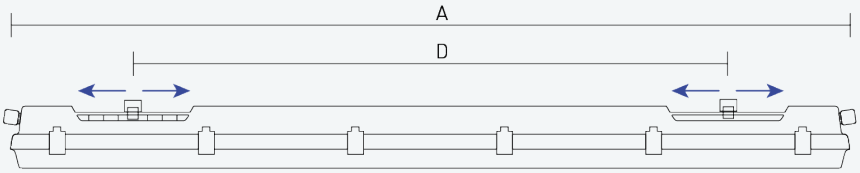
CODE | EAN


**107088** | PRIMA 1.4ft MAX PCc 3200/840 3F | 8596328070884




- Degree of protection: IP66/IP69
- Ambient temperature: -40—65 °C
- Impact strength: IK10
- Life time: 150000 hours / L95 @25°C
- System efficacy: 160 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: M20x1.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 32
- Max. number of luminaires per circuit breaker C16: 53
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: C

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Translucent PC (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Stainless steel + polyamide
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- The light fitting is suitable for indoor and outdoor spaces with extreme temperatures ranging from -40 °C to +65 °C, depending on type.
- Variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)
- Light fitting for environments with high ambient temperature




| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|---|---|---|---|---|---|---|---|---|---|
| 107088 | PRIMA 1.4ft MAX PCc 3200/840 3F | 65 | 3340 | 3110 | 19,4 | 160 | 1,9 | 1175 | 700 - 960 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP69 | IP66 | up to Ta -40°C | up to Ta 65°C | 850°C | IK10 | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | 3F | CRI >80 | CCT 4000 K 3 SDCM | L95 @25°C

CERTIFICATION

CE | HACCP

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | HACCP | LDT DATA

TREVOS

CODE | EAN

**107088** | PRIMA 1.4ft MAX PCc 3200/840 3F | 8596328070884





