TREVOS


CODE | EAN


107916 | TAURI 1.4ft 5400/840 DALI MC 3F M3hAt | 8596328079160



- Degree of protection: IP20
- Ambient temperature: 0—25 °C
- Impact strength: IK08
- Life time: 100000 hours / L80 @25°C
- System efficacy: 142 lm/W
- Colour rendering index CRI: 80-89, 3000—6000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 28
- Max. number of luminaires per circuit breaker C16: 47
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Reflector: Steel sheet, white (RAL 9003)
- Connection: Screwless seven-pole terminal block, 7-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Indoor light fitting for corridors, school interiors, libraries, sanitary facilities, changing rooms, work areas and shop windows
- Opal diffuser made of highly permeable, translucent polycarbonate
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with automated self-testing and 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

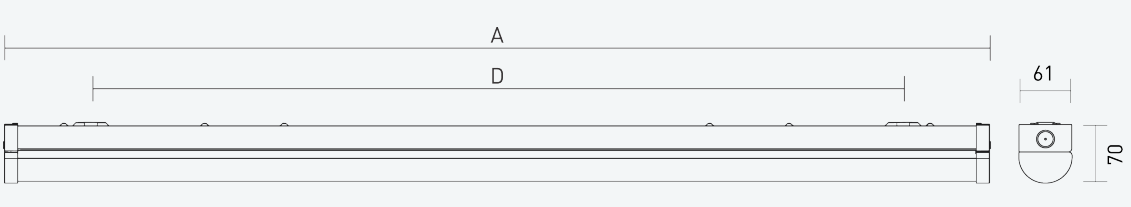



Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
107916	TAURI 1.4ft 5400/840 DALI MC 3F M3hAt	25	5470	4930	34,8	142	1,8	1170	965

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP20 | up to t_a 0°C | up to t_a 25°C | 850°C | IK 08 | LED | D | 220-240 V 50/60 Hz | DALI | EMERGENCY | CRI >80 | L80 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

107916 | TAURI 1.4ft 5400/840 DALI MC 3F M3hAt | 8596328079160



