TREVOS


CODE | EAN


10792 | MO SLIM 1.4ft 3200/840 DALI M3hAt s | 8590515107926




- Degree of protection: IP20
- Impact strength: IK08
- Life time: 150000 hours / L95 @25°C
- System efficacy: 139 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 20
- Max. number of luminaires per circuit breaker C16: 85
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Energy efficiency class of the light source: C

- Body: Aluminium profile, aluminium white colour (RAL 9006)
- Diffuser: Translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: Steel sheet, white (RAL 9003)
- Connection: 2x screwless, five-pole terminal block, three-phase interconnection
- Suspended indoor light fitting with accessories for various installation configurations either separately or in groups
- The light fitting does not include end caps, couplers or suspender. Must be ordered separately
- Opal diffuser made of highly permeable, translucent polycarbonate
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with automated self-testing and 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

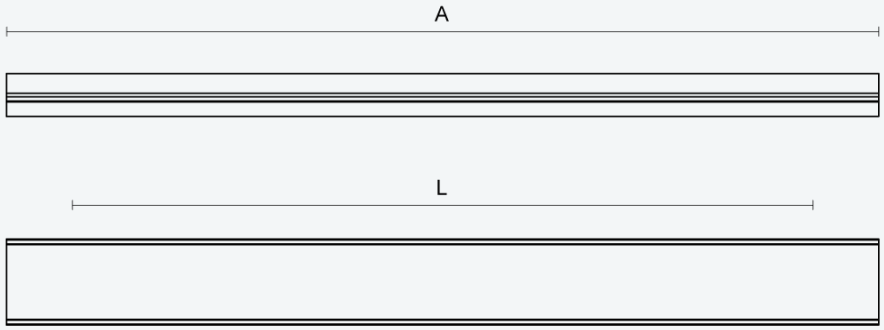





Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]
10792	MO SLIM 1.4ft 3200/840 DALI M3hAt s	3260	2800	20,1	139	3,2	1130

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP20 | 850°C | IK 08 | LED | 220-240 V 50/60 Hz | DALI | EMERGENCY | CRI >80 | CCT 4000 K 3 SDCM | L95 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

10792 | MO SLIM 1.4ft 3200/840 DALI M3hAt s | 8590515107926





