



10803


FUTURA 2.5ft ES ABS AI 6500/840 DALI 3F

8590515108039



- Degree of protection: IP66
- Ambient temperature: -25–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 162 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 18
- Max. number of luminaires per circuit breaker C16: 30
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: dark grey ABS (high chemical resistance, UV stability, RAL 7001)
- Diffuser: translucent acrylic (AC), UV stable, chemically resistant
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless seven-pole terminal block, 7-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Unique design, resistant against humidity and dust, with IP66 enclosure rating and built-in aluminium heat sinks
- Optimal mounting height: 3.5 to 10 m
- Digitally dimmable DALI driver (AC/DC)

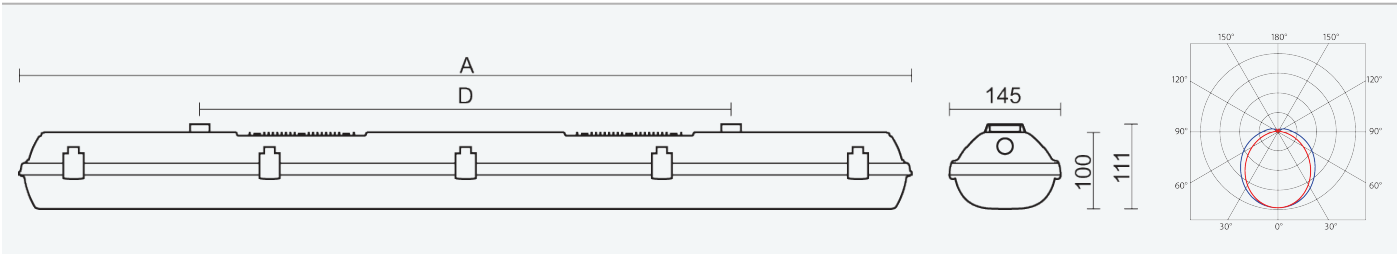

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
10803	FUTURA 2.5ft ES ABS AI 6500/840 DALI 3F	50	6920	6090	37,7	162	4	1452	940

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD





10803

FUTURA 2.5ft ES ABS Al 6500/840 DALI 3F

8590515108039

