



111484


AURIX M 28000/840 DALI A60

8596328114847



- Degree of protection: IP65
- Ambient temperature: -25–50 °C
- Impact strength: IK08
- Life time: 100000 hours / L70 @25°C
- System efficacy: 178 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM4
- Protection class: I
- Energy efficiency class of the light source: C

- Body: Aluminium alloy, black colour (RAL 9011)
- Diffuser: Clear PMMA with integrated optics
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: 1.5m 3-core 3x1mm2 CYSY cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Suitable for high halls, sports venues, advertising spaces and indoor and outdoor industrial spaces.
- Digitally dimmable DALI driver (AC/DC)

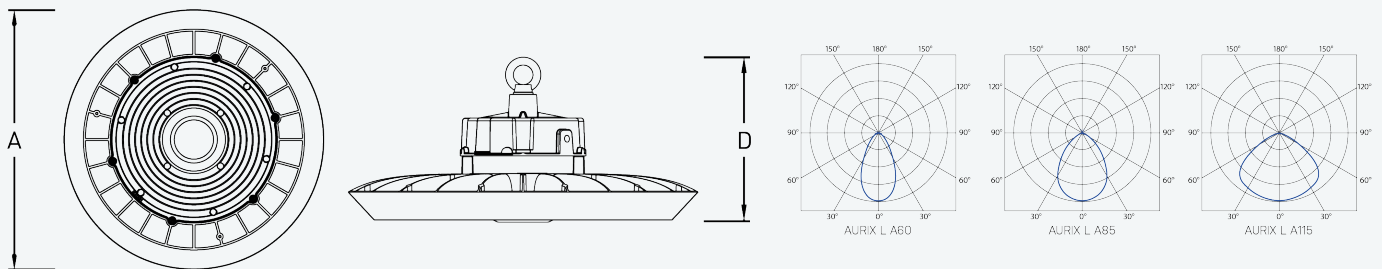

| Code   | Type                          | Ta Max.:<br>[°C] | Luminous flux of LED<br>modules<br>[lm] | Luminous flux of light<br>fitting:<br>[lm] | Power consumption:<br>[W] | System efficacy:<br>[lm/W] | Net weight:<br>[kg] | A<br>[mm] |
|--------|-------------------------------|------------------|-----------------------------------------|--------------------------------------------|---------------------------|----------------------------|---------------------|-----------|
| 111484 | AURIX M 28000/840<br>DALI A60 | 50               | 28040                                   | 26640                                      | 149,5                     | 178                        | 2,1                 | 305       |

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES



## CERTIFICATION



## DOWNLOAD

- INSTALLATION MANUAL
 DATA SHEET
 CE
 LDT DATA



**111484**

**AURIX M 28000/840 DALI A60**

**8596328114847**

