



111486


AURIX M 28000/840 DALI A115

8596328114861



- Degree of protection: IP65
- Ambient temperature: -25–50 °C
- Impact strength: IK08
- Life time: 100000 hours / L70 @25°C
- System efficacy: 178 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM4
- Protection class: I
- Energy efficiency class of the light source: C

- Body: Aluminium alloy, black colour (RAL 9011)
- Diffuser: Clear PMMA with integrated optics
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: 1.5m 3-core 3x1mm2 CYSY cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Suitable for high halls, sports venues, advertising spaces and indoor and outdoor industrial spaces.
- Digitally dimmable DALI driver (AC/DC)

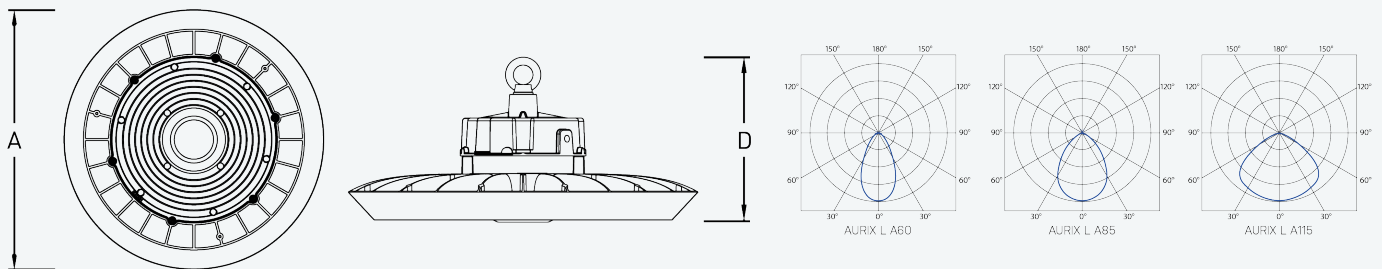

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]
111486	AURIX M 28000/840 DALI A115	50	28040	26640	149,5	178	2,1	305

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD





111486

AURIX M 28000/840 DALI A115

8596328114861

