TREVOS


CODE | EAN


**112351** | UNA L PAR 4000/840 DALI MC FRAME | 8596328123511



- Degree of protection: IP54
- Ambient temperature: -25—35 °C
- Impact strength: IK10
- Life time: 100000 hours / L70 @25°C
- System efficacy: 123 lm/W
- Colour rendering index CRI: 80-89, 3500—5000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: II
- Max. number of luminaires per circuit breaker B16: 47
- Max. number of luminaires per circuit breaker C16: 47
- Energy efficiency class of the light source: C

- Body: Aluminium sheet, white (RAL 9010)
- Diffuser: Opal PMMA
- Reflector: Polished aluminum sheet
- Connection: To driver
- Recessed spotlight boasting a powerful LED module for offices, meeting rooms, ceremonial spaces, halls and corridors
- Opal PMMA and polished aluminium reflector
- Digitally dimmable DALI driver (AC/DC)

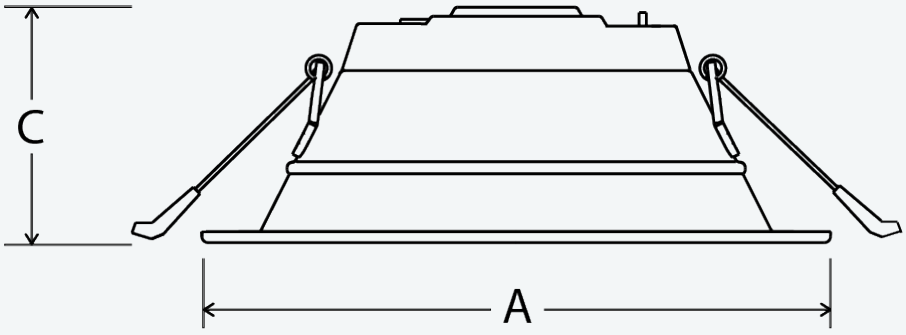


| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | C [mm] |
|---|---|---|---|---|---|---|---|---|---|
| 112351 | UNA L PAR 4000/840 DALI MC FRAME | 35 | 5440 | 4000 | 32,6 | 123 | 0,6 | 232 | 112 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP54 | up to ta -25°C | up to ta 35°C | 850°C | IK10 | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | DALI | CRI >80 | L70 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

**112351** | UNA L PAR 4000/840 DALI MC FRAME | 8596328123511











