TREVOS


CODE | EAN

**112377** | T-LINE 08 15100/840 DALI ML 90D | 8596328123771



- Degree of protection: IP40
- Ambient temperature: -25—40 °C
- Life time: 100000 hours / L80 @25°C
- System efficacy: 194 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 12
- Max. number of luminaires per circuit breaker C16: 19
- Flickering value Pst LM: 1
- Power factor: 0,98
- Stroboscope effect value SVM: 0,4
- Energy efficiency class of the light source: C

- Body: Aluminium profile, white (RAL 9016)
- Diffuser: Clear PMMA, UV stable, with optics for area lighting
- Connection: Screwless eight-pole terminal block
- Suspended indoor light fitting with accessories for various installation configurations either separately or in groups
- Accessories not included. Must be ordered separately
- Clear PMMA with integrated optics, beam angle 90°
- Digitally dimmable DALI driver (AC/DC)

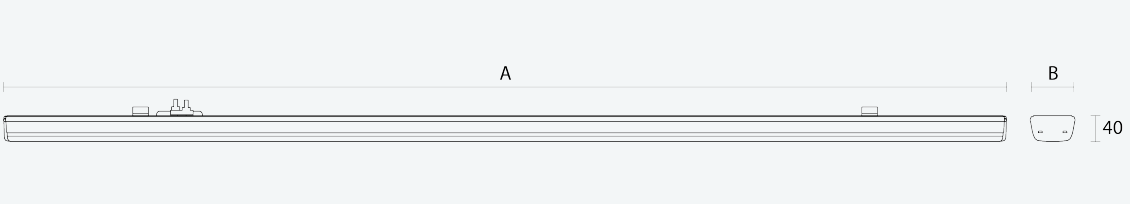


| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | B [mm] |
|---|---|---|---|---|---|---|---|---|---|
| 112377 | T-LINE 08 15100/840 DALI ML 90D | 40 | 19690 | 19300 | 99,3 | 194 | 1,6 | 1500 | 76 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP40 | up to $t_a$ -25°C | up to $t_a$ 40°C | 850°C | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | DALI | CRI >80 | CCT 4000 K 3 SDCM | L80 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

**112377** | T-LINE 08 15100/840 DALI ML 90D | 8596328123771