TREVOS


CODE | EAN


112378 | T-LINE 08 15100/840 DALI ML 90D M3hAt | 8596328123788



- Degree of protection: IP40
- Ambient temperature: 0—40 °C
- Life time: 100000 hours / L80 @25°C
- System efficacy: 194 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 12
- Max. number of luminaires per circuit breaker C16: 19
- Flickering value Pst LM: 1
- Power factor: 0,98
- Stroboscope effect value SVM: 0,4
- Energy efficiency class of the light source: C

- Body: Aluminium profile, white (RAL 9016)
- Diffuser: Clear PMMA, UV stable, with optics for area lighting
- Connection: Screwless eight-pole terminal block
- Suspended indoor light fitting with accessories for various installation configurations either separately or in groups
- Accessories not included. Must be ordered separately
- Clear PMMA with integrated optics, beam angle 90°
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with automated self-testing and 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 800lm)

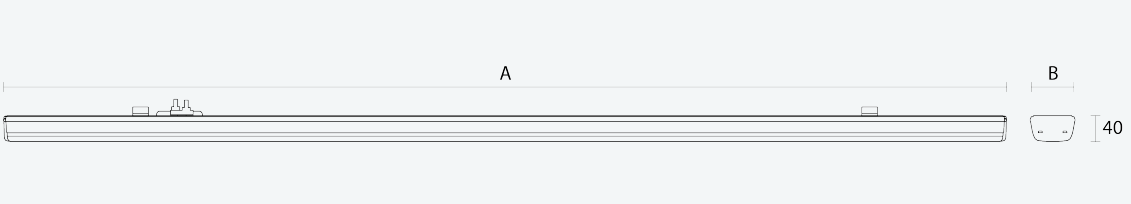



Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	B [mm]
112378	T-LINE 08 15100/840 DALI ML 90D M3hAt	40	19690	19300	99,3	194	1,8	1500	76

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP40 | up to t_a 0°C | up to t_a 40°C | 850°C | LED | D | 220-240 V 50/60 Hz | DALI | EMERGENCY | CRI >80 | CCT 4000 K 3 SDCM | L80 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

112378 | T-LINE 08 15100/840 DALI ML 90D M3hAt | 8596328123788