TREVOS

CODE


112615 | UNA XS PAR 1100/840 DALI MC M3hAt | 8596328126154


EAN



- Degree of protection: IP54
- Ambient temperature: 0—35 °C
- Impact strength: IK10
- Life time: 100000 hours / L70 @25°C
- System efficacy: 109 lm/W
- Colour rendering index CRI: 80-89, 3500—5000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: II
- Max. number of luminaires per circuit breaker B16: 106
- Max. number of luminaires per circuit breaker C16: 106
- Energy efficiency class of the light source: C

- Body: Aluminium sheet, white (RAL 9010)
- Diffuser: Opal PMMA
- Reflector: Polished aluminum sheet
- Connection: To driver
- Recessed spotlight boasting a powerful LED module for offices, meeting rooms, ceremonial spaces, halls and corridors
- Opal PMMA and polished aluminium reflector
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with automated self-testing and 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

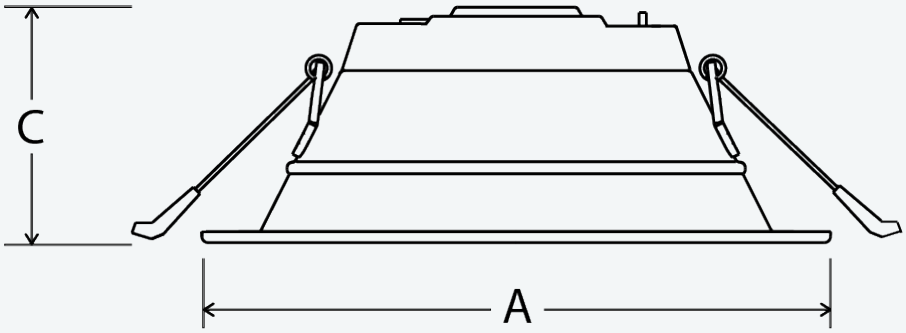



Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	C [mm]
112615	UNA XS PAR 1100/840 DALI MC M3hAt	35	1470	1080	9,9	109	0,5	113	60

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP54 | up to t_a 0°C | up to t_a 35°C | 850°C | IK10 | LED | D | 220-240 V 50/60 Hz | DALI | EMERGENCY | CRI >80 | L70 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

112615 | UNA XS PAR 1100/840 DALI MC M3hAt | 8596328126154







