TREVOS


CODE

**11473** | PRIMA LED TUBE SLIM 2x150 PC 1F | EAN 8590515114733




- Degree of protection: IP66
- Ambient temperature: -25—35 °C
- Impact strength: IK10
- System efficacy: 101 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Clear PC (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless three-pole terminal block, 3-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Luminaire for indoor and covered outdoor industrial spaces intended for retrofitting an existing lighting system (LED TUBE)
- Total luminous flux and electric energy consumption are calculated using Osram SubstiTUBE T8 EM Value sources
- Optimal mounting height: 3 to 8 m

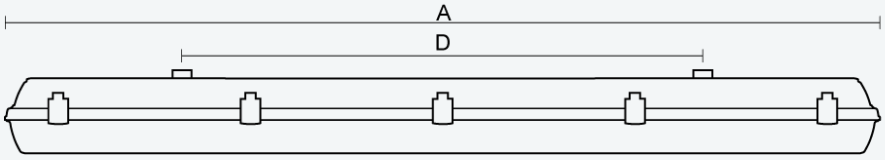








| Code | Type | Ta Max.: [°C] | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|---|---|---|---|---|---|---|---|---|---|
| 11473 | PRIMA LED TUBE SLIM 2x150 PC 1F | 35 | 4000 | 3840 | 38,2 | 101 | 2,5 | 1572 | 940 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES




CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL DATA SHEET CE

TREVOS

CODE | EAN

**11473** | PRIMA LED TUBE SLIM 2x150 PC 1F | 8590515114733



