



11484


PRIMA LED TUBE SLIM 2x120 PC 3F M1h

8590515114849



- Degree of protection: IP66
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 101 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: clear PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm² cross-section, 2.5 mm² available on demand)
- Luminaire for indoor and covered outdoor industrial spaces intended for retrofitting an existing lighting system (LED TUBE)
- Total luminous flux and electric energy consumption are calculated using Osram SubstiTUBE T8 EM Value sources
- Optimal mounting height: 3 to 8 m
- Emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

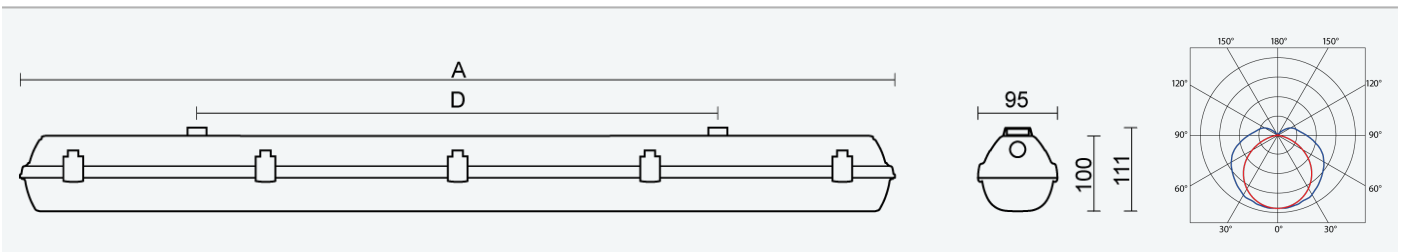


Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
11484	PRIMA LED TUBE SLIM 2x120 PC 3F M1h	25	3400	3260	32,4	101	2,5	1272	700

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



DOWNLOAD





11484

PRIMA LED TUBE SLIM 2x120 PC 3F M1h

8590515114849

