




- Degree of protection: IP20
- Ambient temperature: 0–40 °C
- Life time: 50000 hours
- Protection class: II
- Energy efficiency class of the light source: D

- Body: White polycarbonate
- Diffuser: Transparent polycarbonate, UV stable, with optics for area lighting
- Connection: Screwless three-pole terminal block
- Luminaire for emergency lighting of corridors and offices
- Can be connected for emergency (SE) lighting
- Emergency back-up power supply for temporary emergency lighting, connected to L3

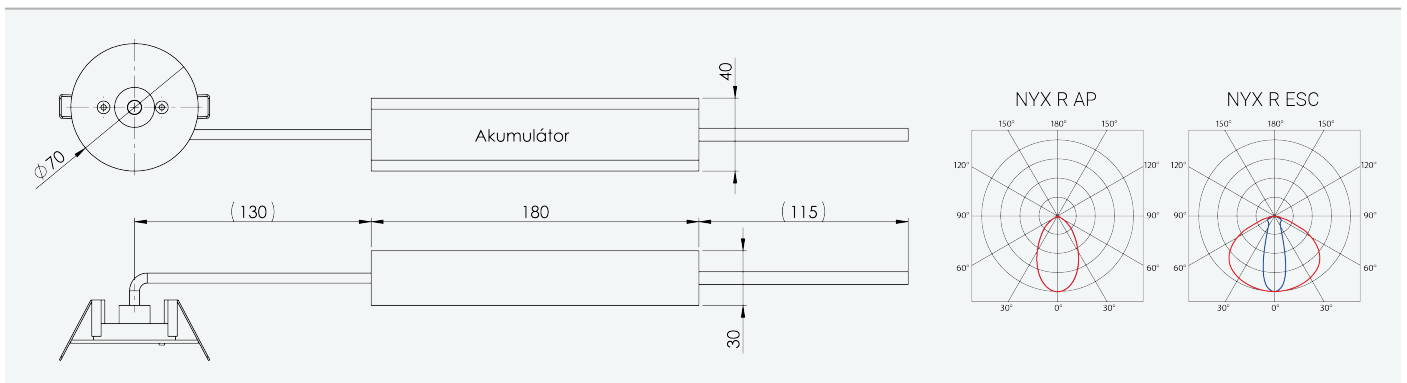

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	Net weight: [kg]
12270	NYX R AP M3hAt	40	110	110	3,0	0,2

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

- [INSTALLATION MANUAL](#)
- [DATA SHEET](#)
- [CE](#)
- [LDT DATA](#)

