




- Degree of protection: IP20
- Ambient temperature: 0–40 °C
- Life time: 50000 hours
- Protection class: II
- Energy efficiency class of the light source: B

- Body: White polycarbonate
- Diffuser: Transparent polycarbonate, UV stable, with optics for path lighting
- Connection: Screwless three-pole terminal block
- Luminaire for emergency lighting of corridors and offices
- Can be connected for emergency (SE) lighting
- Emergency back-up power supply for temporary emergency lighting, connected to L3

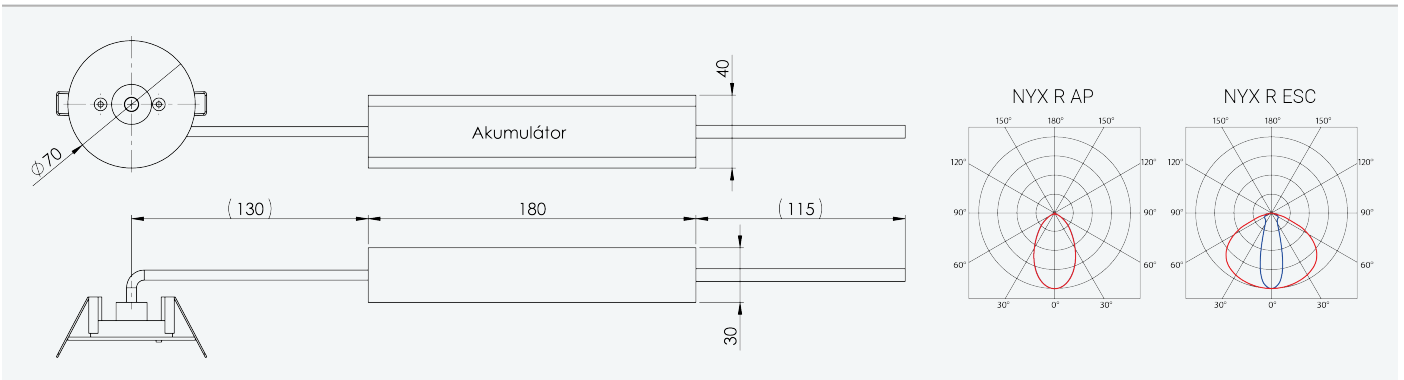

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	Net weight: [kg]
12272	NYX R ESC M3hAt	40	110	110	3,0	0,3

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
- DATA SHEET
- CE
- LDT DATA

