TREVOS

CODE

12278 | ERYX M3hAt


EAN

8590515122783



- Degree of protection: IP65
- Ambient temperature: 0—40 °C
- Impact strength: IK10
- Life time: 100000 hours / L80 @25°C
- Protection class: II
- Energy efficiency class of the light source: D

- Body: White polycarbonate
- Diffuser: Translucent polycarbonate (PC), UV stable, impact resistant
- Connection: Screwless three-pole terminal block
- Luminaire for emergency and orientation lighting of corridors, offices, warehouses, production halls
- Can be connected for both permanent (SA) and emergency (SE) lighting
- Emergency back-up power supply for temporary emergency lighting, connected to L3

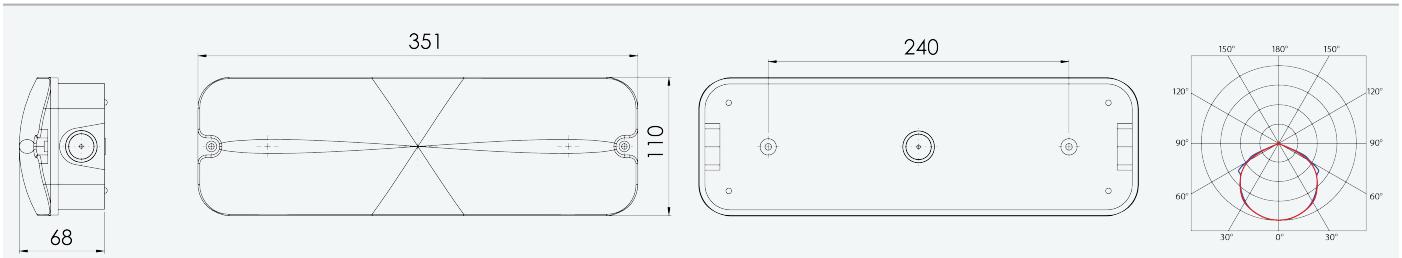

Code	Type	Ta Max.: [°C]	Ambient temperature: [°C]	Net weight: [kg]
12278	ERYX M3hAt	40	0—40	0,5

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP65 | up to t_a 0°C | up to t_a 40°C | IK 10 | LED | D | 220-240 V 50/60 Hz | L80 @25°C

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE

TREVOS

CODE | EAN

12278 | ERYX M3hAt | 8590515122783









