



CODE

EAN

**37120**


**BELTR LED TUBE 1x120**

**8590515371204**



- Degree of protection: IP40
- Ambient temperature: -25–35 °C
- Impact strength: IK08
- Life time: 50000 hours
- System efficacy: 85 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I

- Body: Steel sheet, white (RAL 9003)
- Diffuser: Translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: Steel sheet, white (RAL 9003)
- Connection: Screwless three-pole terminal block
- Surface-mount, indoor light fitting for installation onto the ceiling or wall in public areas, option for series connection
- Total luminous flux and electric energy consumption are calculated using Osram SubstiTUBE T8 EM Value sources

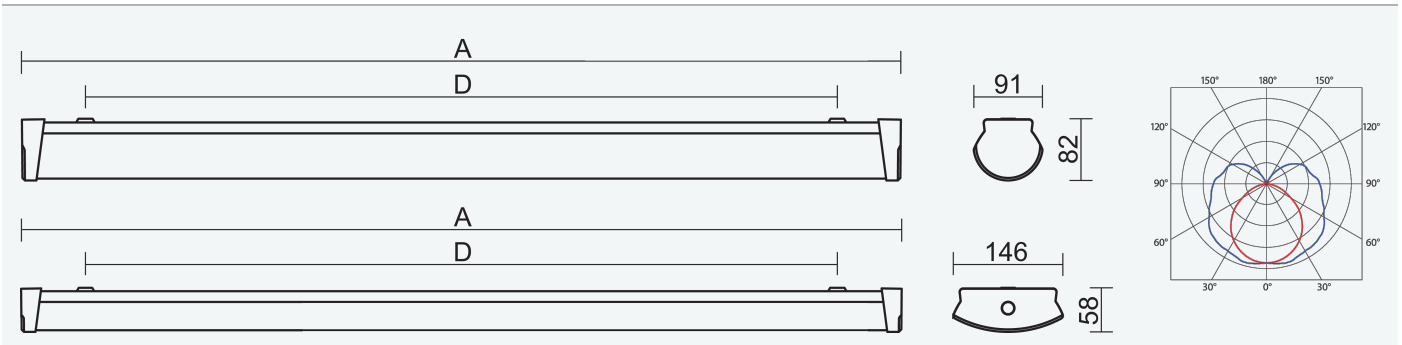

Code	Type	Luminous flux of LED modules [lm]	Net weight: [kg]	A [mm]	D [mm]
37120	BELTR LED TUBE 1x120	1700	0,9	1245	900

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

FEATURES



CERTIFICATION



DOWNLOAD

- [INSTALLATION MANUAL](#)
- [DATA SHEET](#)
- [CE](#)



**37120**

**BELTR LED TUBE 1x120**

**8590515371204**

