




- Degree of protection: IP40
- Ambient temperature: 0–25 °C
- Impact strength: IK08
- Life time: 50000 hours
- System efficacy: 86 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I

- Body: steel sheet, white (RAL 9003)
- Diffuser: translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: steel sheet, white (RAL 9003)
- Connection: screwless five-pole terminal block
- Surface-mount, indoor light fitting for installation onto the ceiling or wall in public areas, option for series connection
- Emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

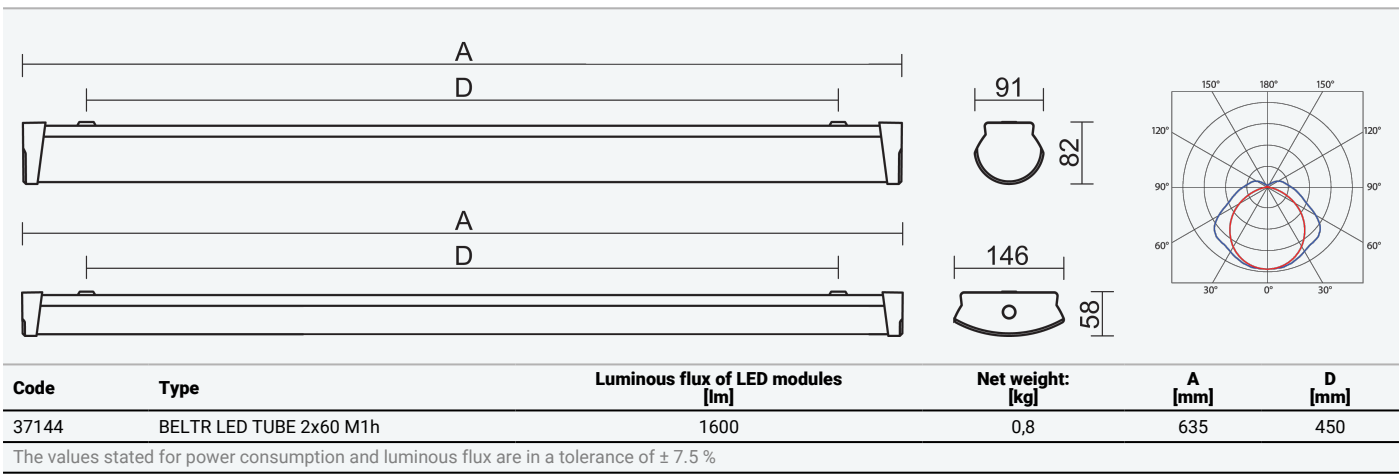

FEATURES



CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
- DATA SHEET
- CE
- LDT DATA



37144

BELTR LED TUBE 2x60 M1h

8590515371440

