



CODE

EAN

**37154**


**BELTR LED TUBE 2x120 M1h**

**8590515371549**



- Degree of protection: IP40
- Ambient temperature: 0–25 °C
- Impact strength: IK08
- Life time: 50000 hours
- System efficacy: 85 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I

- Body: steel sheet, white (RAL 9003)
- Diffuser: translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: steel sheet, white (RAL 9003)
- Connection: screwless five-pole terminal block
- Surface-mount, indoor light fitting for installation onto the ceiling or wall in public areas, option for series connection
- Total luminous flux and electric energy consumption are calculated using Osram SubstiTUBE T8 EM Value sources
- Emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

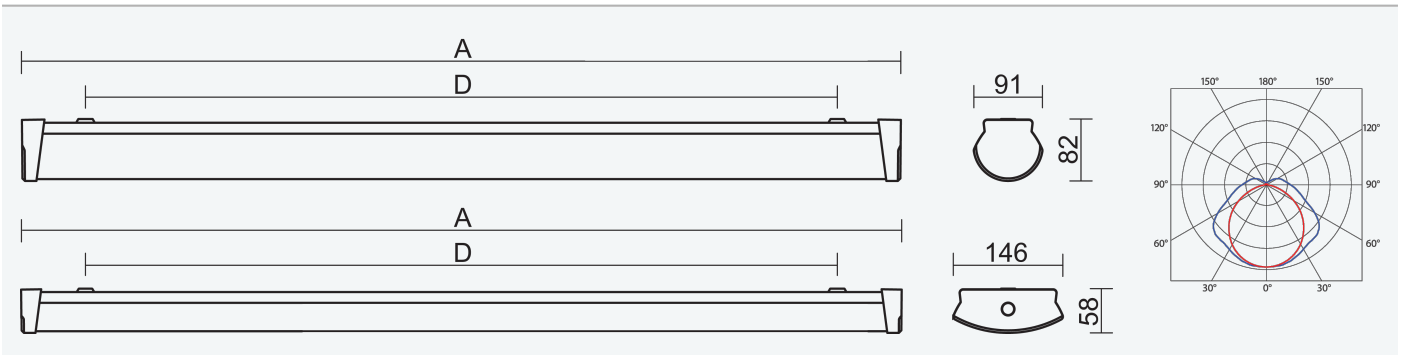

Code	Type	Luminous flux of LED modules [lm]	Net weight: [kg]	A [mm]	D [mm]
37154	BELTR LED TUBE 2x120 M1h	3400	1,4	1245	900

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

- [INSTALLATION MANUAL](#)
- [DATA SHEET](#)
- [CE](#)

