TREVOS


CODE


37533 | PRIMA LED TUBE 1x150 PC 3F | EAN 8590515375332




- Degree of protection: IP66
- Ambient temperature: -25—35 °C
- Impact strength: IK10
- System efficacy: 93 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Clear PC (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Luminaire for indoor and covered outdoor industrial spaces intended for retrofitting an existing lighting system (LED TUBE)
- Total luminous flux and electric energy consumption are calculated using Osram SubstiTUBE T8 EM Value sources
- Optimal mounting height: 3 to 8 m

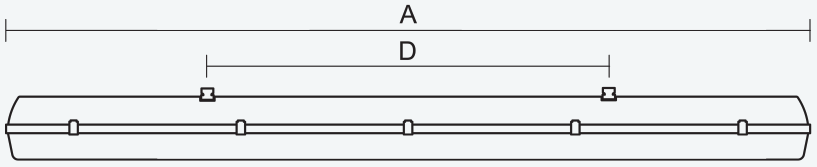





Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
37533	PRIMA LED TUBE 1x150 PC 3F	35	2000	1780	19,1	93	2,1	1572	940

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66 | up to t_a -25°C | up to t_a 35°C | 850°C | IK10 | LED | WARRANTY 5 | D | 3F

CERTIFICATION

CE | HACCP

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | HACCP

TREVOS

CODE | EAN

37533 | PRIMA LED TUBE 1x150 PC 3F | 8590515375332







