


- Degree of protection: IP66
- Ambient temperature: -25–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 93 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Luminaire for indoor and covered outdoor industrial spaces intended for retrofitting an existing lighting system (LED TUBE)
- Optimal mounting height: 3 to 8 m

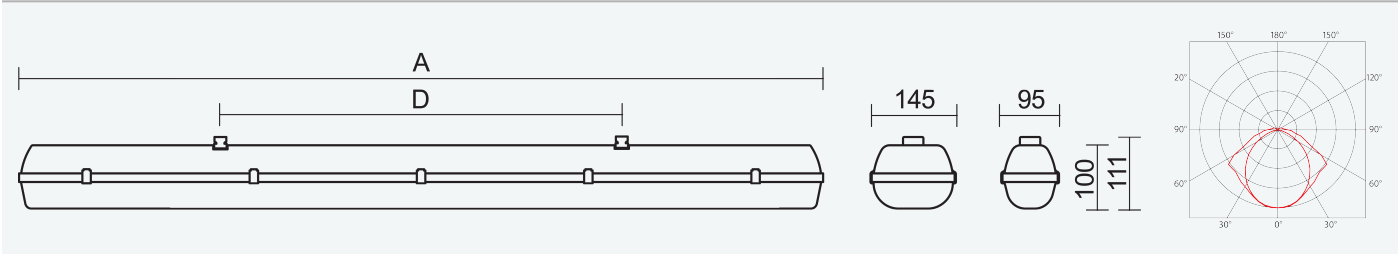

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
37633	PRIMA LED TUBE 1x150 PCc 3F	35	2000	1780	19,1	93	1,9	1572	940

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66

up to
-25°C

up to
35°C

850°C

IK 10

LED

WARRANTY
5

3F

CERTIFICATION

CE

HACCP

DOWNLOAD

INSTALLATION MANUAL

DATA SHEET

CE

HACCP

LDT DATA

