




- Degree of protection: IP20
- Ambient temperature: 0–40 °C
- Impact strength: IK08
- Life time: 50000 hours
- Protection class: I
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: steel sheet, aluminium white colour (RAL 9006)
- Diffuser: clear acrylic glass, UV stable
- Connection: screwless five-pole terminal block
- Luminaire for emergency and orientation lighting of corridors, offices, warehouses, production halls
- Can be connected for both permanent (SA) and emergency (SE) lighting
- Emergency back-up power supply for temporary emergency lighting, connected to L3 (lum. flux 440lm)

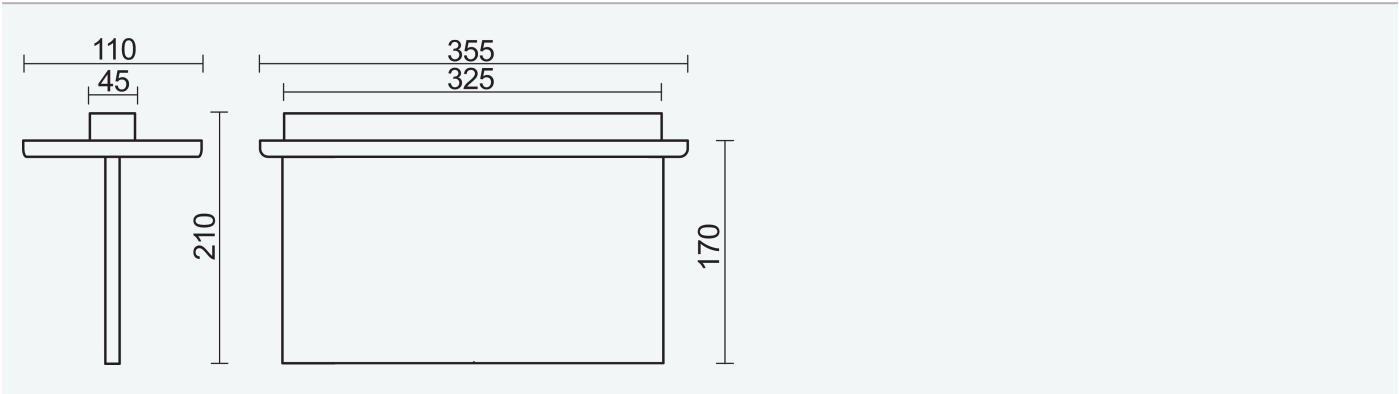

Code	Type	Net weight: [kg]
41519	PLEXI LED 101 NM1h	2,1

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
- DATA SHEET
- CE

