



8590515476008

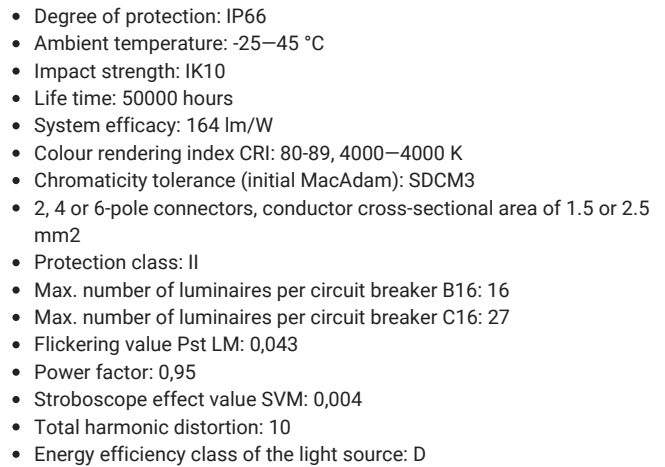

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless two-pole terminal block
- Resistant to humidity and dust, with IP66 enclosure rating
- Optimal mounting height: 3.5 to 10 m
- ON/OFF electronic driver (AC, DC on demand)

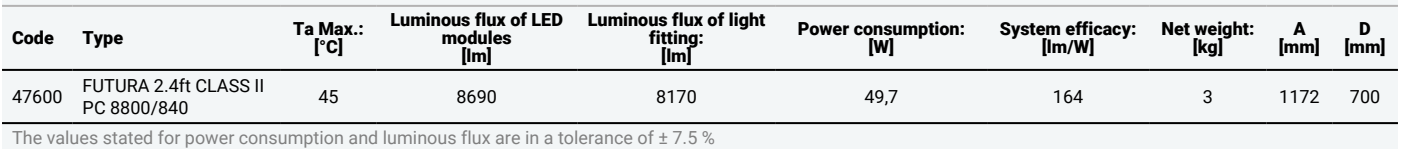

IP66

Up to
-25°C

Up to
45°C

650°C

IK 10

LED

WARRANTY
5

D

220-240 V
50/60 Hz

CRI
>80

CCT
4000 K
3 SDCM

L90
B10

→

CE HACCP

 INSTALLATION MANUAL DATA SHEET CE HACCP LDT DATA



47600

FUTURA 2.4ft CLASS II PC 8800/840

8590515476008

