




- Degree of protection: IP66
- Ambient temperature: -25–45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 163 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- 2, 4 or 6-pole connectors, conductor cross-sectional area of 1.5 or 2.5 mm2
- Protection class: II
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,043
- Power factor: 0,95
- Stroboscope effect value SVM: 0,004
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless two-pole terminal block
- Resistant to humidity and dust, with IP66 enclosure rating
- Optimal mounting height: 3.5 to 10 m
- ON/OFF electronic driver (AC, DC on demand)

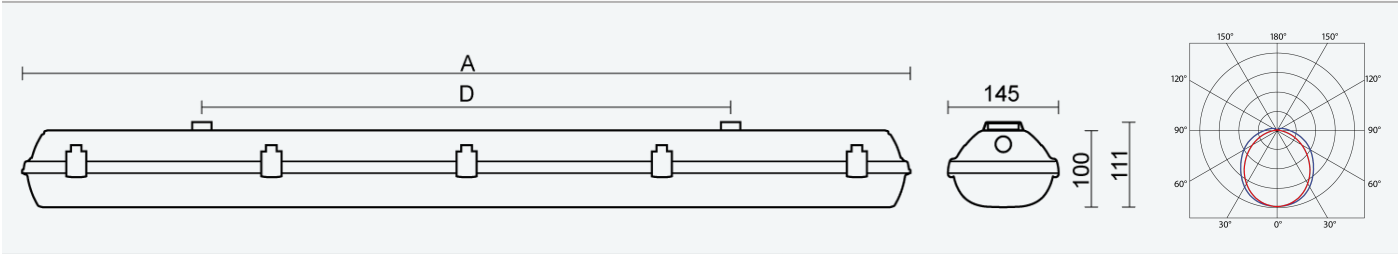

| Code  | Type                                   | Ta Max.:<br>[°C] | Luminous flux of LED<br>modules<br>[lm] | Luminous flux of<br>light fitting:<br>[lm] | Power consumption:<br>[W] | System efficacy:<br>[lm/W] | Net weight:<br>[kg] | A<br>[mm] | D<br>[mm] |
|-------|----------------------------------------|------------------|-----------------------------------------|--------------------------------------------|---------------------------|----------------------------|---------------------|-----------|-----------|
| 47750 | FUTURA 2.5ft CLASS II<br>PCc 11000/840 | 45               | 12310                                   | 11570                                      | 71,1                      | 163                        | 3,9                 | 1452      | 940       |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD





47750

FUTURA 2.5ft CLASS II PCc 11000/840

8590515477500

