



50748


ALUMAX LED 2.4ft 5200/840 DALI 3F M3h

8590515507481



- Degree of protection: IP66
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 129 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: brass, M18X1.5
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 21
- Max. number of luminaires per circuit breaker C16: 35
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey aluminium profile, powder coated
- Diffuser: satin, heat-strengthened safety glass
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel
- Sealing: polyurethane (PUR) in the groove on the body
- Connection: screwless seven-pole terminal block, 7-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand)
- Chemically resistant, dustproof and waterproof industrial light fitting made of painted aluminium alloy
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with 3 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

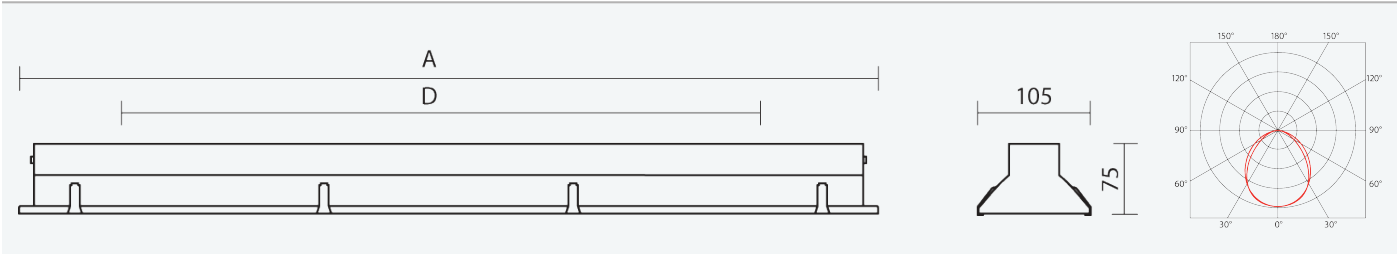

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
50748	ALUMAX LED 2.4ft 5200/840 DALI 3F M3h	25	5230	3920	30,3	129	4,3	1224	1134

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
- DATA SHEET
- CE
- LDT DATA



50748

ALUMAX LED 2.4ft 5200/840 DALI 3F M3h

8590515507481

