

62210


PRIMA LED 1.2ft PC NM1h

8590515622108



- Degree of protection: IP66
- Ambient temperature: 0–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 100
- Max. number of luminaires per circuit breaker C16: 170
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Optimal mounting height: 3 to 8 m
- Emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for temporary emergency lighting, connected to L3 (lum. flux 440lm)

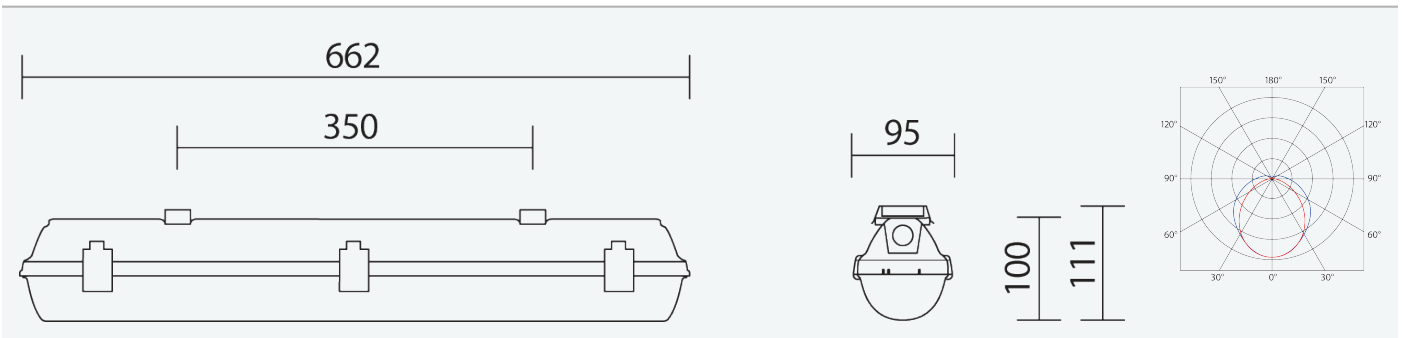

Code	Type	Luminous flux of LED modules [lm]	Net weight: [kg]
62210	PRIMA LED 1.2ft PC NM1h	500	1,5

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES




CERTIFICATION



DOWNLOAD





62210

PRIMA LED 1.2ft PC NM1h

8590515622108

