

CODE

EAN

62281


PRIMA LED 1.2ft PCc NM1hAt 2x5P L3

8590515622818



- Degree of protection: IP66
- Ambient temperature: 0–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 100
- Max. number of luminaires per circuit breaker C16: 170
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Optimal mounting height: 3 to 8 m
- Emergency back-up power supply with autotest and 1 hour runtime
- Emergency back-up power supply for temporary emergency lighting, connected to L3 (lum. flux 440lm)

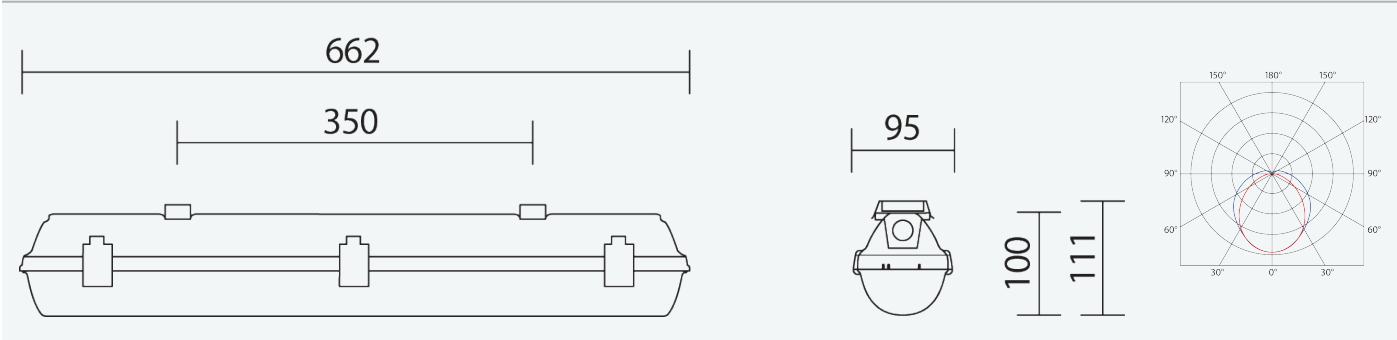

| Code  | Type                               | Luminous flux of LED modules [lm] | Net weight: [kg] |
|-------|------------------------------------|-----------------------------------|------------------|
| 62281 | PRIMA LED 1.2ft PCc NM1hAt 2x5P L3 | 500                               | 1,3              |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES




CERTIFICATION



DOWNLOAD





62281

PRIMA LED 1.2ft PCc NM1hAt 2x5P L3

8590515622818

