


62423


FUTURA 2.2ft PC NM3hAt

8590515624232

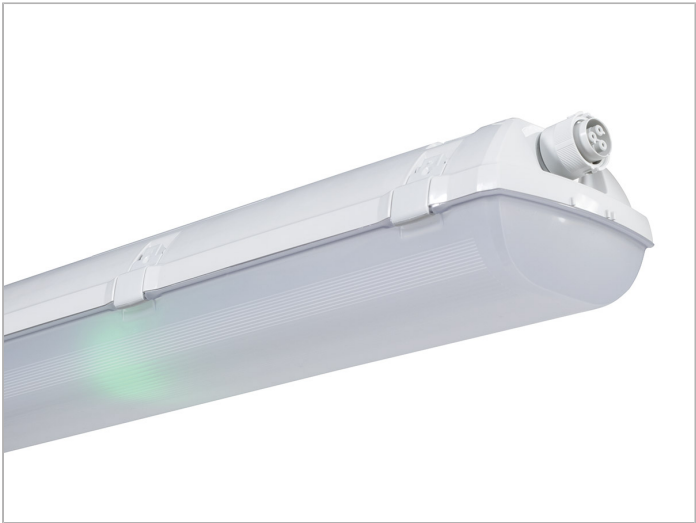

- Degree of protection: IP66
- Ambient temperature: 0–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 100
- Max. number of luminaires per circuit breaker C16: 170
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block
- Resistant to humidity and dust, with IP66 enclosure rating
- Optimal mounting height: 3.5 to 10 m
- Emergency back-up power supply with autotest and 3 hour runtime
- Emergency back-up power supply for temporary emergency lighting, connected to L3 (lum. flux 440lm)

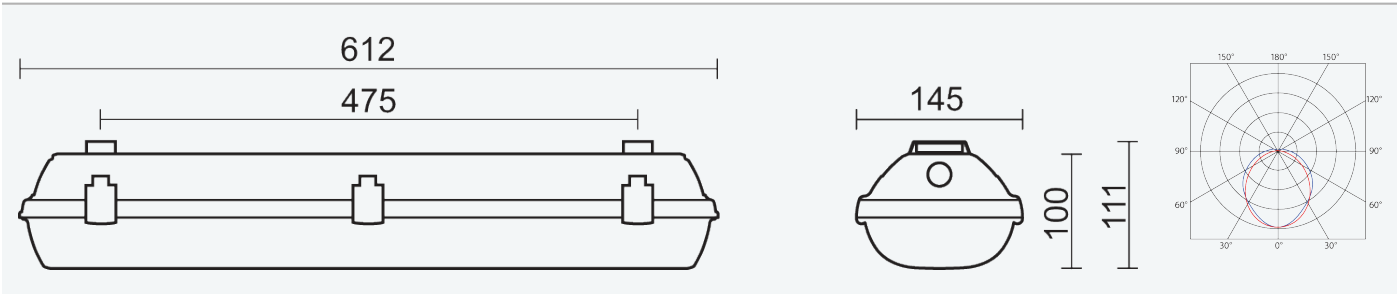

| Code  | Type                   | Net weight:<br>[kg] |
|-------|------------------------|---------------------|
| 62423 | FUTURA 2.2ft PC NM3hAt | 1,4                 |

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66

up to

0°C

up to

50°C

IK 10

LED

D

220-240 V  
50/60 Hz

L80  
B20

CERTIFICATION



DOWNLOAD

INSTALLATION MANUAL

DATA SHEET

CE

LDT DATA

