


62444


FUTURA 2.2ft PCc 3F NM3hAt

8590515624447

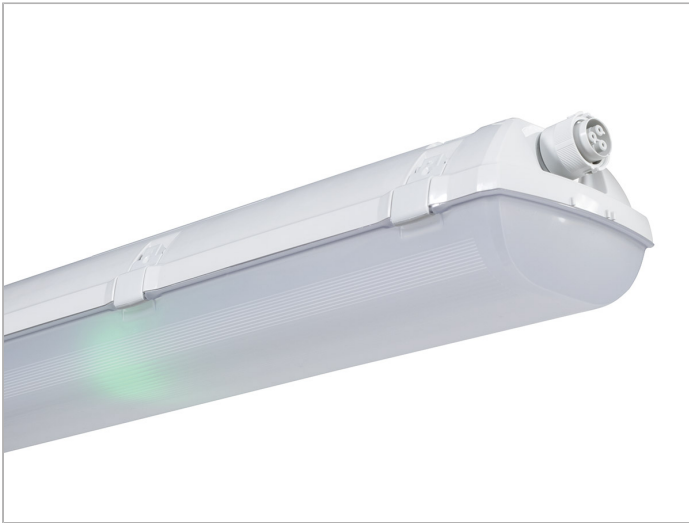

- Degree of protection: IP66
- Ambient temperature: 0–50 °C
- Impact strength: IK10
- Life time: 50000 hours
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 100
- Max. number of luminaires per circuit breaker C16: 170
- Power factor: 0,95
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm² cross-section, 2.5 mm² available on demand)
- Resistant to humidity and dust, with IP66 enclosure rating
- Optimal mounting height: 3.5 to 10 m
- Emergency back-up power supply with autotest and 3 hour runtime
- Emergency back-up power supply for temporary emergency lighting, connected to L3 (lum. flux 440lm)

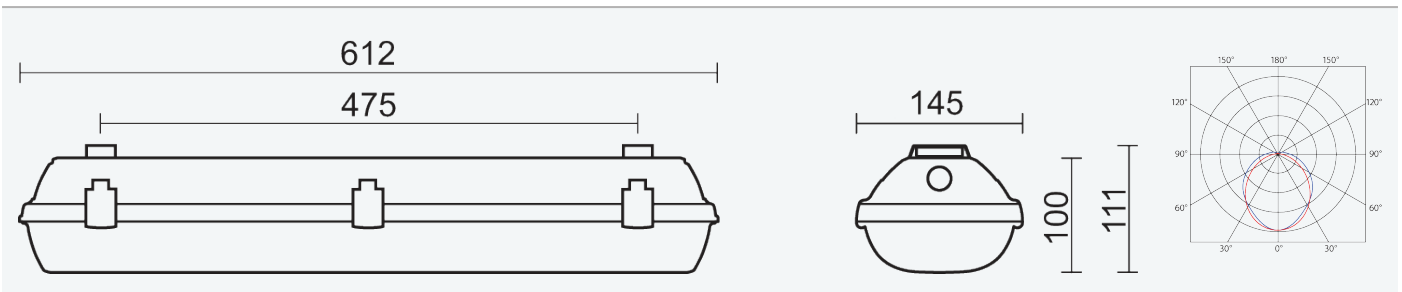

Code	Type	Net weight: [kg]
62444	FUTURA 2.2ft PCc 3F NM3hAt	1,4

The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5\%$

FEATURES




CERTIFICATION



DOWNLOAD





62444

FUTURA 2.2ft PCc 3F NM3hAt

8590515624447

