



63257


LINEA 2.4ft 6400/840 DALI M1h

8590515632572



- Degree of protection: IP54
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 141 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 21
- Max. number of luminaires per circuit breaker C16: 35
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: white polycarbonate (PC, RAL 9003), UV stable, impact resistant
- Diffuser: translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: steel sheet, white (RAL 9003)
- Clips: rotary cap (polyamide + 10 % fibreglass)
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block
- Surface-mount, plastic indoor light fitting for installation onto the ceiling or wall in public or non-public areas
- Opal diffuser made of highly permeable, translucent polycarbonate
- Digitally dimmable DALI driver (AC/DC), emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L3 (lum. flux 440lm)

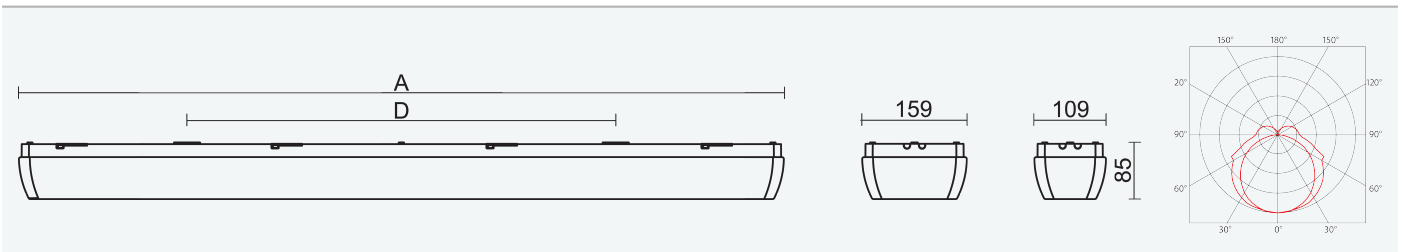

| Code  | Type                          | Luminous flux of LED modules [lm] | Luminous flux of light fitting: [lm] | Power consumption: [W] | System efficacy: [lm/W] | Net weight: [kg] | A [mm] | D [mm] |
|-------|-------------------------------|-----------------------------------|--------------------------------------|------------------------|-------------------------|------------------|--------|--------|
| 63257 | LINEA 2.4ft 6400/840 DALI M1h | 6240                              | 5120                                 | 36,3                   | 141                     | 2,9              | 1160   | 650    |

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES




## CERTIFICATION



## DOWNLOAD





CODE

EAN

63257

LINEA 2.4ft 6400/840 DALI M1h

8590515632572

