



**64047**


**PRIMA LED 1.4ft SNS PC 2600/840 CORRIDOR M1h**

**8590515640478**



- Degree of protection: IP66
- Ambient temperature: 0–25 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: PG 13.5 thread
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 21
- Max. number of luminaires per circuit breaker C16: 35
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,4
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless five-pole terminal block
- Light fitting with a built-in microwave sensor for height of 1-6 m, sensitivity of 2 - 50 lx and time interval of 5 sec to 30 min
- Optimal mounting height: 3 to 8 m
- Digitally dimmable DALI driver with corridor function, microwave motion sensor, emergency back-up power supply with 1 hour runtime
- Emergency back-up power supply for permanent and emergency lighting, connected to L1 (lum. flux 440lm)

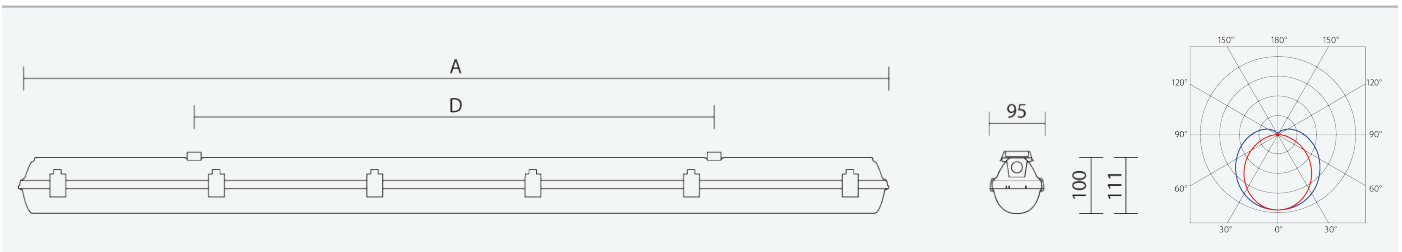

| Code  | Type                                            | Ta Max.:<br>[°C] | Luminous flux of LED<br>modules<br>[lm] | Luminous flux of<br>light fitting:<br>[lm] | Power consumption:<br>[W] | System<br>efficacy:<br>[lm/W] | Net weight:<br>[kg] | A<br>[mm] | D<br>[mm] |
|-------|-------------------------------------------------|------------------|-----------------------------------------|--------------------------------------------|---------------------------|-------------------------------|---------------------|-----------|-----------|
| 64047 | PRIMA LED 1.4ft SNS PC<br>2600/840 CORRIDOR M1h | 25               | 2600                                    | 2310                                       | 16,1                      | 143                           | 2,1                 | 1272      | 700       |

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES




## CERTIFICATION



## DOWNLOAD





64047

PRIMA LED 1.4ft SNS PC 2600/840 CORRIDOR M1h

8590515640478

